

WR-10 Waveguide Circulator with 15 dB min Isolation from 82.2 GHz to 84.2 GHz using UG-387/U-M Cover Flange in Brass

The FM-W10CR001 is a Waveguide Circulator offering 15 dB minimum isolation over the W band frequency range of 82.2 to 84.2 GHz. The design achieves high isolation with wide band performance and the WR-10 waveguide uses UG-387/U-M compatible flanges on all ports and has a power rating of 0.5 watts (CW).

Fairview Microwave offers a wide variety of circulators and waveguide circulators to fit your needs. These unique devices enable two signals to use one channel. The classic use of this three port device is for the line between an antenna and a transceiver, allowing the receive signal to come from the antenna (port 1) to the receiver (port 2) while the transmit signal goes from the transmitter (port 3) to the antenna (port 1). An isolator can be created by terminating one port into a matched load. These components can be used in antenna transmitting and receiving, radar, amplifier systems and anything that requires isolation from a signal reflection and the ability to send signals in opposite directions down a single channel. These circulators feature excellent insertion loss, high isolation and reliability.



Features:

- WR-10 Waveguide Circulator
- W Band Frequency Range 82.2 to 84.2 GHz
- UG-387/U-M Flange Configuration
- Maximum VSWR 1.5:1
- Minimum 15 dB isolation
- Maximum Power 0.5 W (CW)

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	82.2		84.2	GHz
VSWR			1.5:1	
Insertion Loss			1	dB
Isolation	15			dB
Forward Power (CW)			0.5	Watts
Input Power (Peak)			20	Watts

Mechanical Specifications

Size	
Length	1.1 in [27.94 mm]
Width	0.76 in [19.3 mm]
Height	1.14 in [28.96 mm]
Weight	0.15 lbs [68.04 g]
Waveguide Size	WR-10
Flange Designation	UG-387/U-M
Flange Type	Cover
Flange Material and Plating	Brass, Gold

Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data



Notes:


Applications:

- Radar Systems
- Military
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

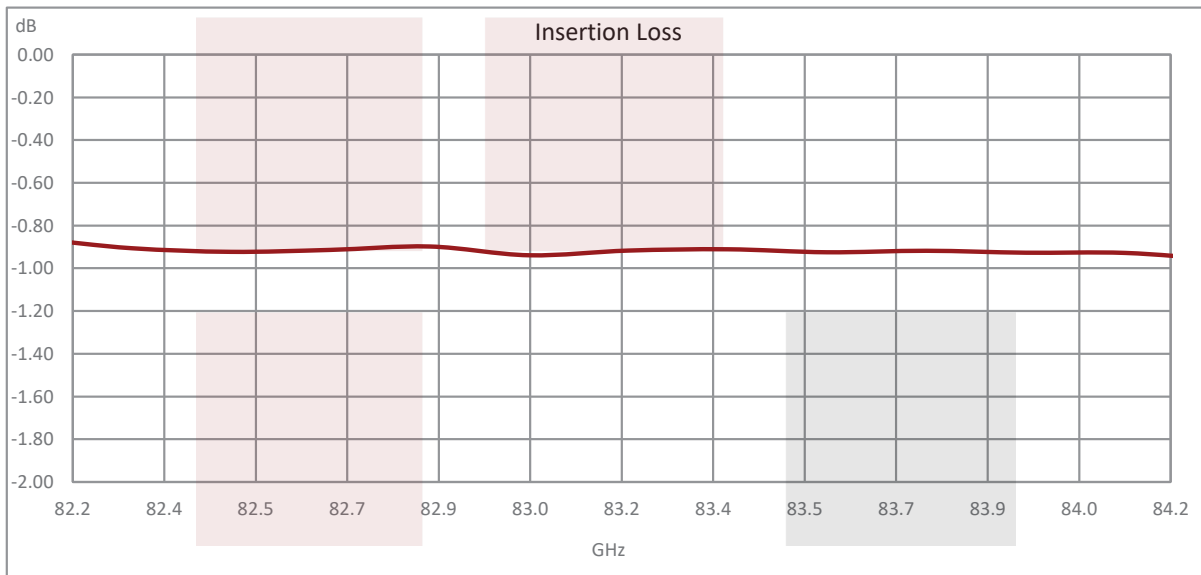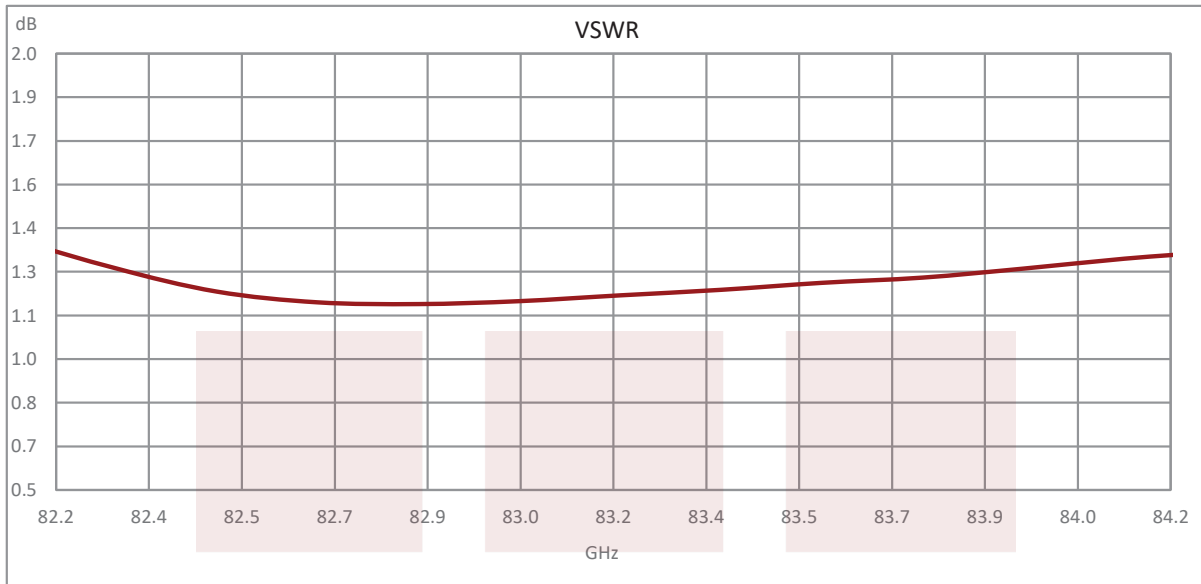

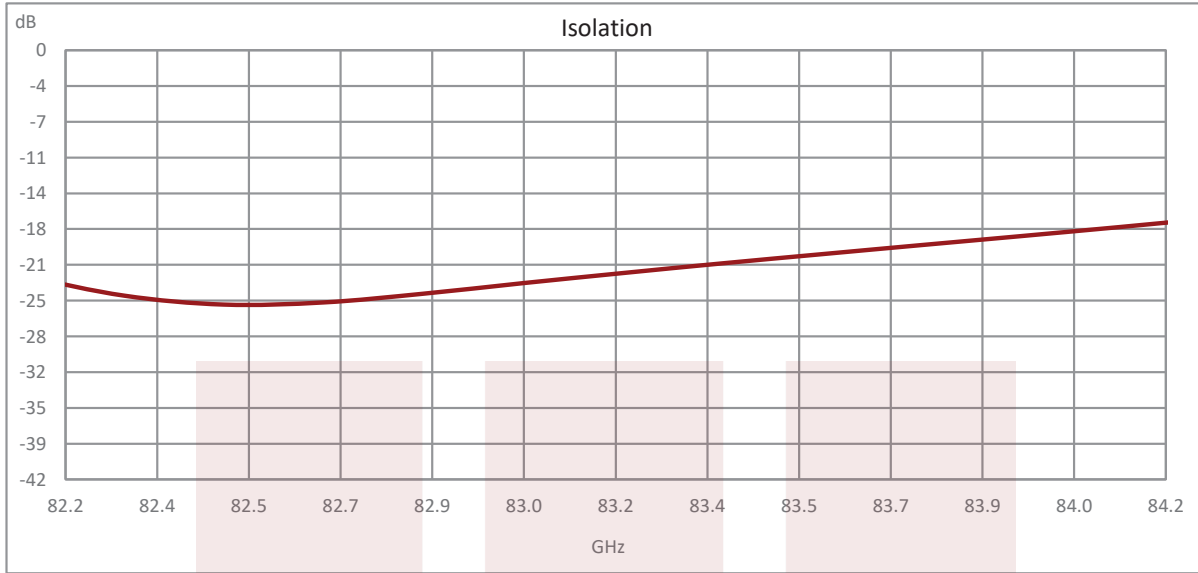

WR-10 Waveguide Circulator with 15 dB min Isolation from 82.2 GHz to 84.2 GHz using UG-387/U-M Cover Flange in Brass from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [WR-10 Waveguide Circulator with 15 dB min Isolation from 82.2 GHz to 84.2 GHz using UG-387/U-M Cover Flange in Brass FM-W10CR001](https://www.fairviewmicrowave.com/wr10-waveguide-circulator-15db-84.2-ghz-ug387m-cover-flange-brass-fm-w10cr001-p.aspx)

URL: <https://www.fairviewmicrowave.com/wr10-waveguide-circulator-15db-84.2-ghz-ug387m-cover-flange-brass-fm-w10cr001-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

