

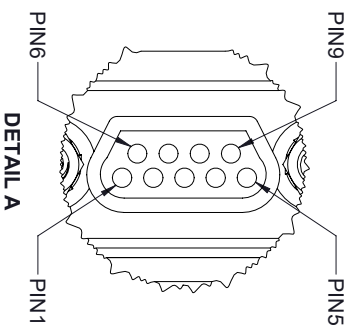


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/28/2020	T.GALLA

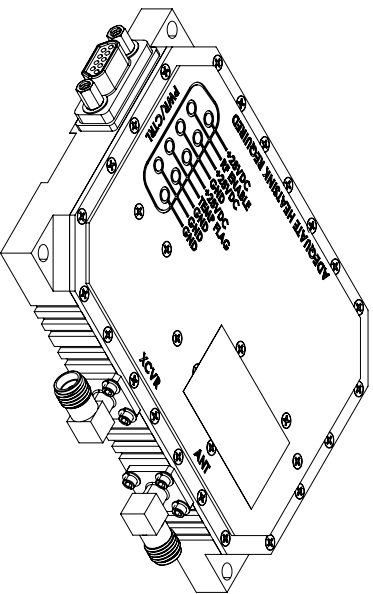

Pin #	I/O	Function
1,2,6,8	I	GND
3,4,5	I	DC Power (+28VDC)
7	0	Over Temperature Flag 0V = Temperature Fault + 5V = No Fault
9	I	T/R Control (+3.3V Logic) Manual Mode 0V or GND = TX NC or +3.3V = RX

LABEL

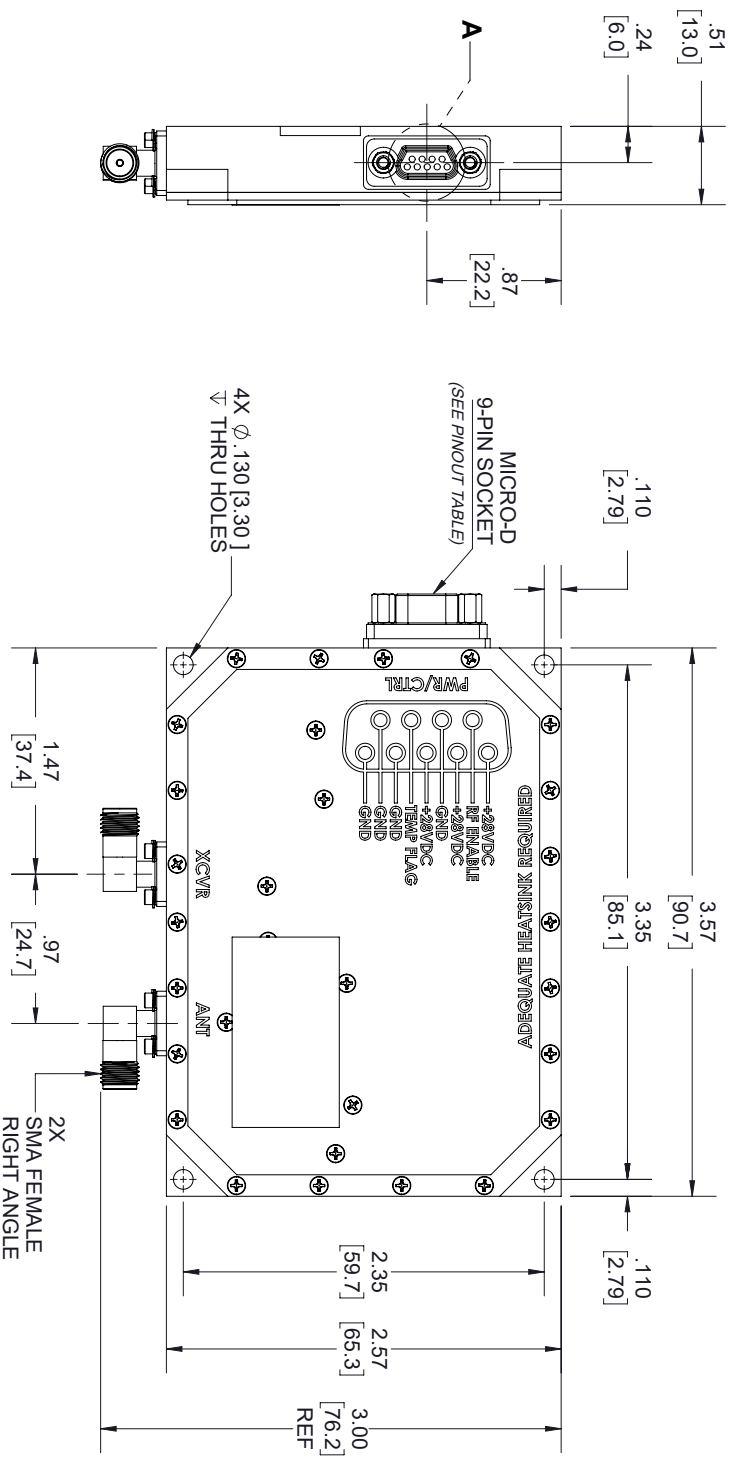

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.



TITLE

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
CABLE LENGTH (L) TOLERANCES:
L ≤ 12 (305) = +1 (25) / -0
12 (305) < L ≤ 60 (1524) = +2 (51) / -0
60 (1524) < L ≤ 120 (3048) = +4 (102) / -0
120 (3048) < L ≤ 300 (7620) = +6 (152) / -0
300 (7620) < L = +5%L / -0

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	SCALE
A	3FKRS	K.DANG	FM15B5005	N/A

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	SHEET	OF
	1	3