




SEE NOTE 2

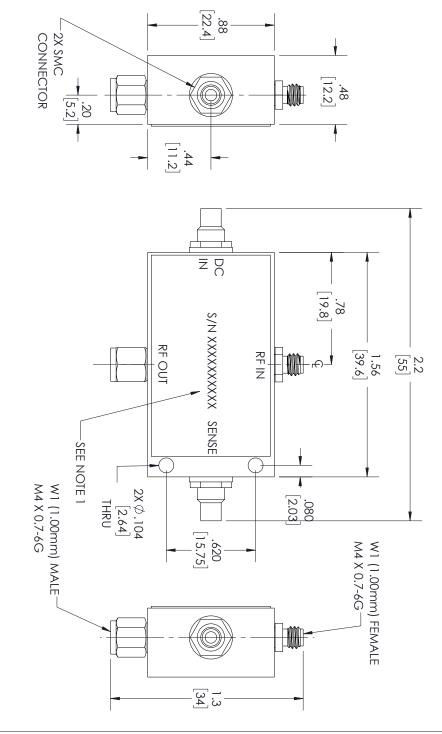

NOTES:

- SERIAL NUMBER AND DATE CODE ARE COMBINED, EX. 2022310002
 22 24 48 INCH CABLE ASSEMBLY PROVIDED

REGULATORY COMPLIANCE:

EU ROHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

NILOW PROHIBITED.

NILOW PROHIBITED.

NILOW PROHIBITED.



an INFINIT® brand

III III III

ALL DIMENSIONS SHOWN ARE FOR REFERE SIZE CAGE CODE DRAWN BY A 3EKDS BDI I CHACK!	X=±.2 [5.08] FRACTIONS XX=±.02 [.51] ±1/32 XXX=±.005[.13] ANGLES±1°		TOLERANCES:	UNLESS OTHERWISE SPECIF
)WN ARE FOR REFERENCE ONLY.	_		CABLE LENGTH (L) TOLERANCES:	UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS
SCALE N/A	SHEET OF 1	DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.	THE INEORMATION AND	THIRD-ANGLE PROJECTION
		120 3048 < L < 300 (7620) = +6 [152] / -0	L \$ 12 [305] = +1 [25] - 0 12 [305] < L \$ 60 [1624] = +2 [51] / -0 60 [1524] < L \$ 200 [1624] = +4 [102] / -0 120 [3048] < L \$ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5%L / -0 WAN ARE FOR REFERENCE ONLY.	CABLELENGTH (L) TOLERANCES: L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 102 [3048] = +4 [102] / -0 120 [3048] < L ≤ 102 [3048] = +4 [102] / -0 300 [7620] < L = +5%L / -0 WAN ARE FOR REFERENCE ONLY.