


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/19/2021	S. ELLIS



- NOTES:**
- CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE END OF THE CONNECTOR.
 - 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

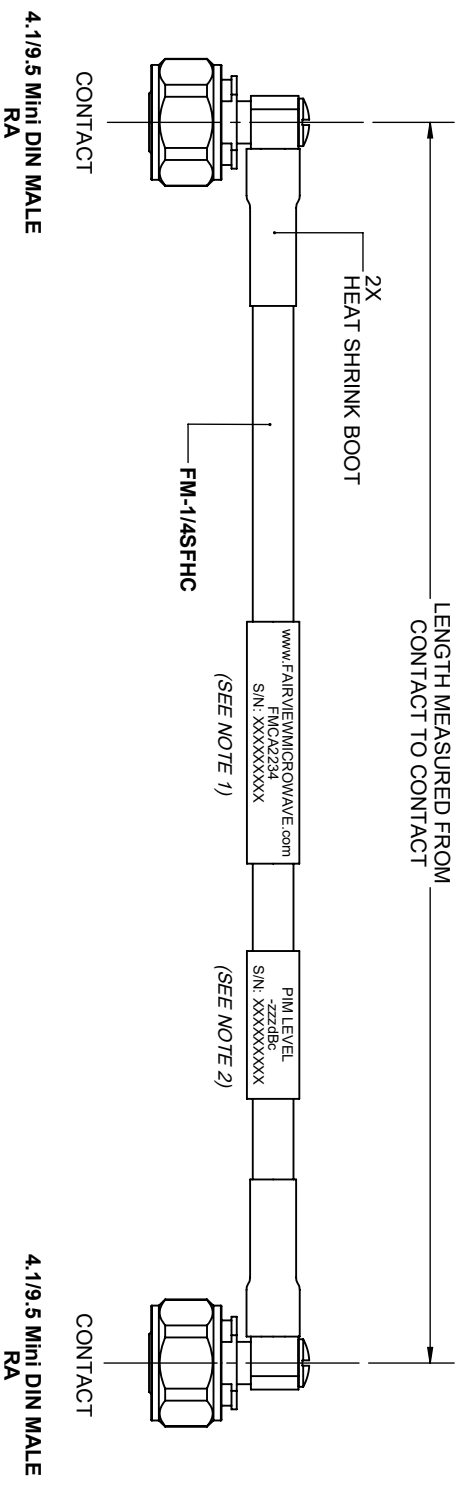

TITLE		<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table border="0"> <tr> <td>X = ±.2</td> <td>[5.08]</td> <td>FRACTIONS</td> <td>12 [305] < L ≤ 60 [1524] = +2 [51] / -0</td> </tr> <tr> <td>XX = ±.02</td> <td>[.51]</td> <td>± 1/32</td> <td>60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</td> </tr> <tr> <td>XXX = ±.005</td> <td>[.13]</td> <td>ANGLES ± 1°</td> <td>120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</td> </tr> <tr> <td></td> <td></td> <td></td> <td>300 [7620] < L = +5% / -0</td> </tr> </table>		X = ±.2	[5.08]	FRACTIONS	12 [305] < L ≤ 60 [1524] = +2 [51] / -0	XX = ±.02	[.51]	± 1/32	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0	XXX = ±.005	[.13]	ANGLES ± 1°	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0				300 [7620] < L = +5% / -0
X = ±.2	[5.08]	FRACTIONS	12 [305] < L ≤ 60 [1524] = +2 [51] / -0																
XX = ±.02	[.51]	± 1/32	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0																
XXX = ±.005	[.13]	ANGLES ± 1°	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0																
			300 [7620] < L = +5% / -0																
SIZE	GAGE CODE	DRAWN BY	ITEM NO.	SCALE															
A	3FKRS	K.DANG	FMC42234	N/A															
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.				REV															
				A															