



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	FOR FMCP1029	3/25/2021	S.FONG

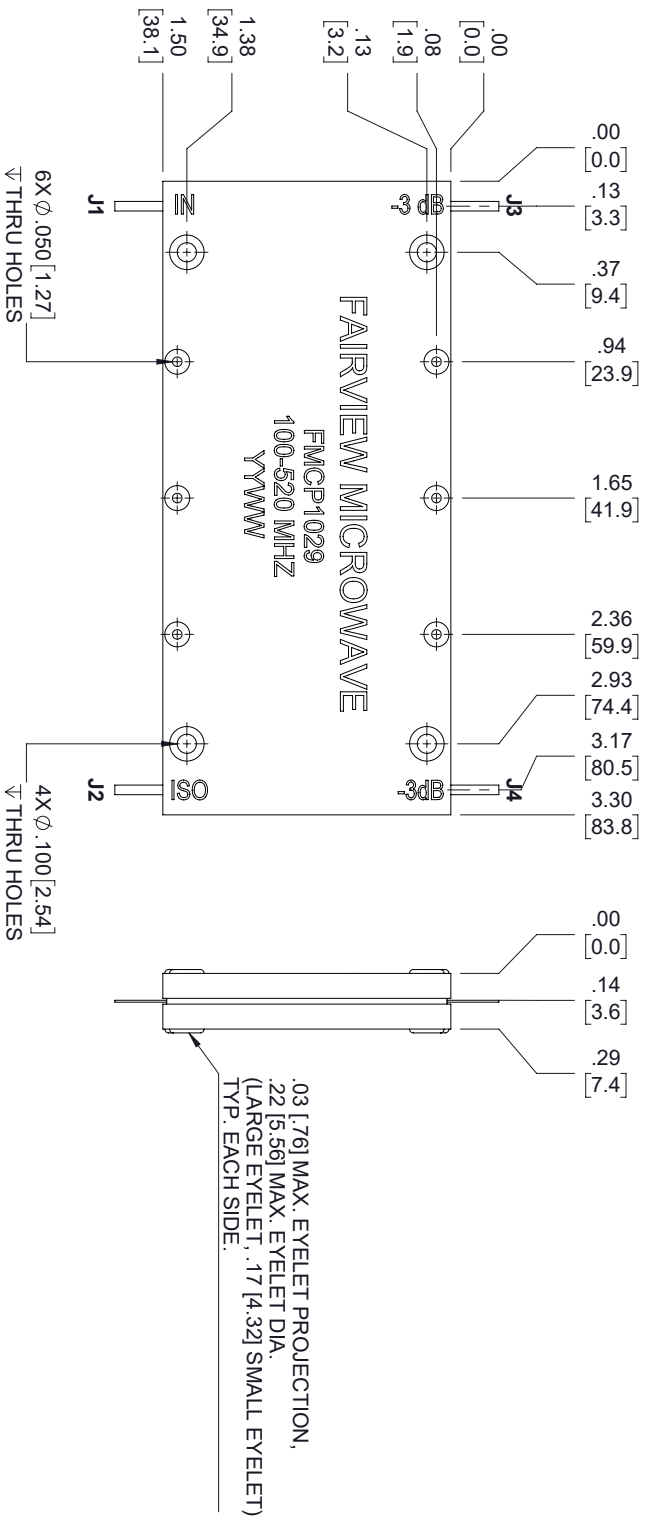

PORT CONFIGURATION				
	J1	J2	J3	J4
INPUT	J1	J2	J3	J4
J1	----	ISOLATION	-3dB < 0°	-3dB < -90°
J2	ISOLATION	----	-3dB < -90°	-3dB < 0°
J3	-3dB < 0°	-3dB < -90°	----	ISOLATION
J4	-3dB < -90°	-3dB < 0°	ISOLATION	----

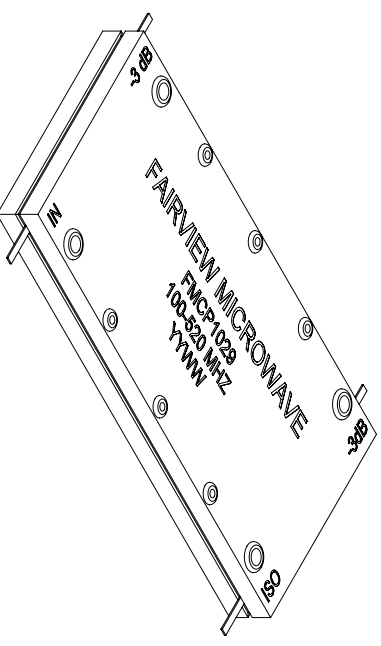

**NOTES:**

- LEAD MATERIAL: GOLD PLATED 99.99% PURE SILVER .056 [1.27] THICK X .05 [1.27] WIDE X .150 [3.81] MIN. LONG.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

**Fairview Microwave™**  
an INFINIT@ brand

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES		THIRD-ANGLE PROJECTION	
DIMENSIONS IN [ ] ARE MILLIMETERS			
TOLERANCES:		THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.	
CABLE LENGTH (L) TOLERANCES:	L ≤ 12 [305] = +1 [25] / -0	12 [305] < L ≤ 60 [1524] = +2 [51] / -0	60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
	120 [3048] < L ≤ 300 [7620] = +6 [152] / -0	300 [7620] < L = +5%L / -0	
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.		SCALE	N/A

TITLE	SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
	A	3FKRS	K.DANG	FMCP1029	A