
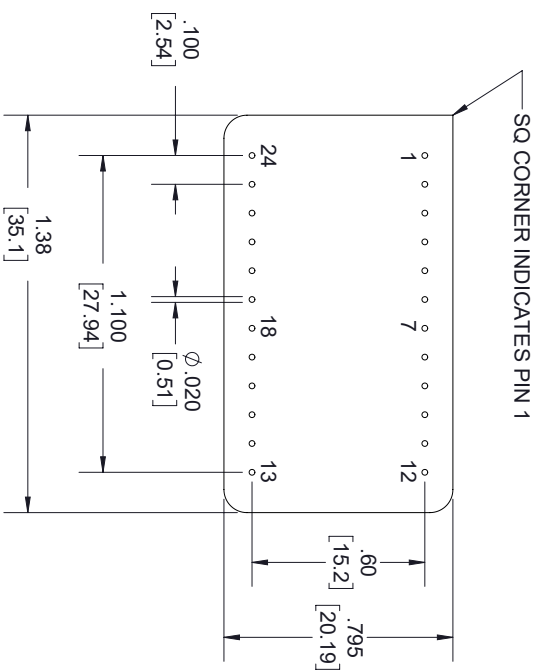


| REVISIONS |                        |            |          |
|-----------|------------------------|------------|----------|
| REV.      | DESCRIPTION            | DATE       | APPROVED |
| A         | INITIAL RELEASE        | 02/18/2020 | TGALLA   |
| B         | ADDED PIN DESCRIPTIONS | 08/11/2020 | TGALLA   |

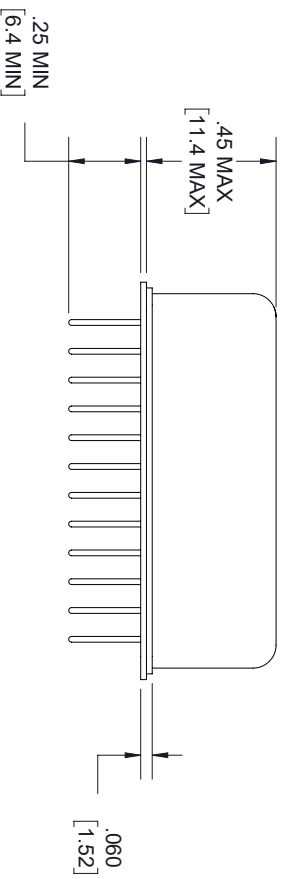


**B**

**24 PIN**  
 Pin 18 = +VCC  
 Pin 13 = Output  
 Pin 7 = TTL Option  
 All other Pins Ground

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.



TITLE

|  |           |          |          |   |     |
|--|-----------|----------|----------|---|-----|
| UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES<br>DIMENSIONS IN [ ] ARE MILLIMETERS                                |           |          |          | THIRD-ANGLE PROJECTION  |     |
| TOLERANCES:  |           |          |          |    |     |
| CABLE LENGTH (L) TOLERANCES:   |           |          |          | THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.   |     |
| X = ±.2 [5.08] FRACTIONS ±.005 [.13] ANGLES ± 1°<br>XX = ±.02 [.51] ±.005 [.13] ANGLES ± 1°<br>XXX = ±.005 [.13] ANGLES ± 1° |           |          |          | L ± 1/2 B065 = +1 [25] / -0<br>12 [305] < L ≤ 60 [1524] = +2 [51] / -0<br>60 [1524] < L ≤ 120 [3048] = +4 [102] / -0<br>120 [3048] < L ≤ 300 [7620] = +6 [152] / -0<br>300 [7620] < L = +5%L / -0 |     |
| ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.   |           |          |          |   |     |
| SIZE   | CAGE CODE | DRAWN BY | ITEM NO. | SCALE   | REV |
| A  | 3FKR5     | DZINN    | FMNS5001 | N/A   | B   |