


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE		
B	PCR	08/17/2021	KLEITLEIN

SPECIFICATIONS

MECHANICAL

MATERIALS BODY: PASSIVATED ALUMINIUM
CONNECTORS: N-FEMALE; TRIPLATE
TEMP RANGE: -35 TO +85°C
WEIGHT: 1.90Z N-TYPE
IP67

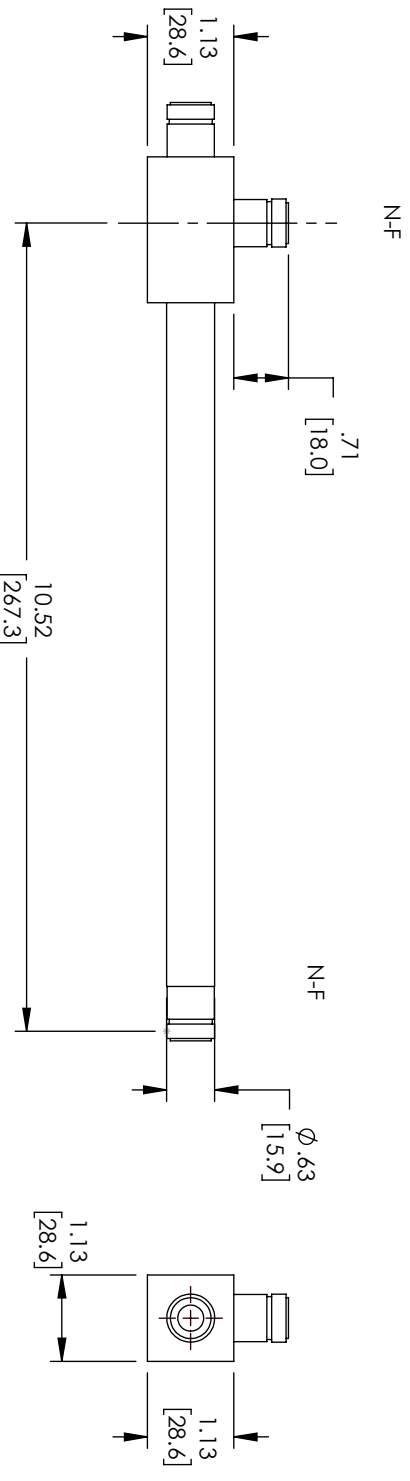

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.



TITLE

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS				THIRD-ANGLE PROJECTION	
TOLERANCES:				THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.	
CABLE LENGTH (L) TOLERANCES:				SCALE	
$L \leq 12$ [305] = +1 [25] / -0 $12 < L \leq 60$ [1524] = +2 [51] / -0 $60 < L \leq 120$ [3048] = +4 [102] / -0 $120 < L \leq 300$ [7620] = +6 [152] / -0 $300 < L$ [7620] = +5% / -0				SHEET 1 OF 1	
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV	REV
A	3FKR5	PD	MP8705	N/A	B