


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	FOR SA3D511-XX	3/4/2020	M.MILLER

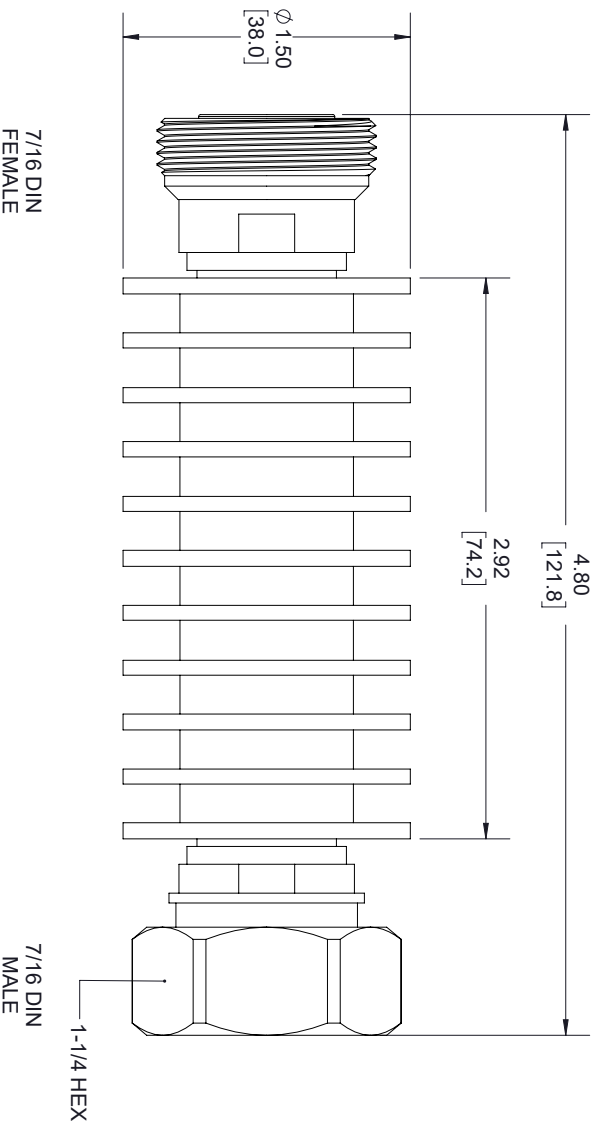


PN: SA3D511-20
 SN: XXXXXXXXX
 BIDIRECTIONAL ATTENUATOR
 7/16 M/F 50W 20dB DC 3GHz

LABEL

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.



TITLE

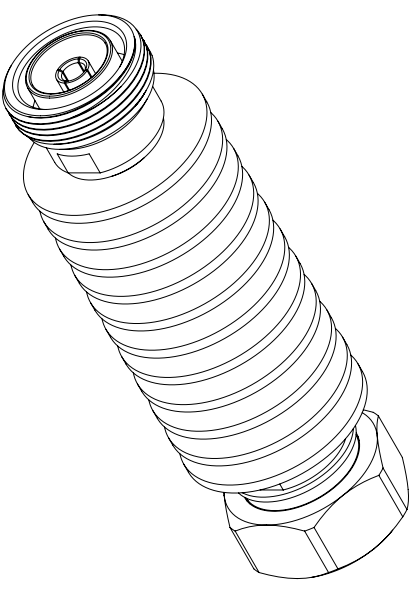

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES
 DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

CABLE LENGTH (L) TOLERANCES:

	FRACTIONS	± 1/32	ANGLES ± 1°
X = ±.2	[.008]		
XX = ±.02	[.51]		
XXX = ±.005	[.13]		

L ± 1/2 [806] = +1 [25] / -0
 L 1/305] < L ≤ 60 [1524] = +2 [51] / -0
 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
 300 [7620] < L = +5%L / -0

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF FAIRVIEW MICROWAVE CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

SCALE N/A

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	3FKR5	K.DANG	SA3D511-20	A