

	REV	
Р	ΞV.	
PCR SC3775 2020915	DESCRIPTION	REVISIONS
09/29/20	DATE	
SRAUTUS	APPROVED	



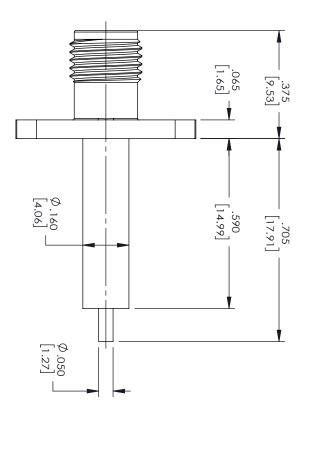

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES

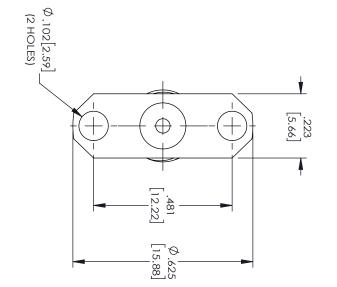

SIZE		X = ±.2 [5.08] FRACTIONS XX = ±.02 [5.1] ± 1/32 XXX = ±.005 [.13] ANGLES ± 1° 120 [3048] < 1 ≤ 300 [76]					9	
CAGE CODE 3FKR5	ALL DIM					TOLEB		
	ENSIONS SHO				CEG.	NOEs.	DIMENSIONS	
DRAWN BY	OWN ARE FOR REFERE				CABLE LENGTH	CVBLETENCTH	IN [] ARE MILLIMETERS	
ITEM NO.	NCE ONLY.	1/1524] = +2 [51]/-0 1/1524] = +2 [51]/-0 1/1524] = +4 [102]/-0 1/1620] = +6 [152]/-0 1/1620] = +5%L/-0			(F) TOLERANCES.	A TOLEBANICES:	S	
SC3775	SCALE	SHEET 1	DESIGN IN TH	THE INFORM				
REV	N/A	OF 1	RESERVED.	IS DOCUMENT	1ATION AND		‡	
	CAGE CODE DRAWN BY ITEM NO.	ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. CAGE CODE DRAWN BY ITEM NO.	120 3048 < 300 7620 = 46 1522 < 0	12 13 13 14 15 15 15 15 15 15 15	Cage Code	12 15 16 17 17 17 17 17 17 17	CABLE LENGTH (L) TOLERANCES: CABLE LENGTH (L) TOLERANCES: L \(\) 12 [305] = \(\) 12 [30] = \(\) 12 [305] = \(\) 12 [305] = \(\) 12 [305] = \(\) 12 [305] = \(\) 12 [305] \(\) \(\) \(\) 12 [305] \(\) \(\) \(\) \(\) 12 [305] \(\) \(\	TOLERANGES: CABLE LENGTH (L.) TOLERANGES: