

MINI-SMP-FEMALE


SPECIFICATIONS

ELECTRICAL

FREQUENCY: 0-65 GHZ
 IMPEDANCE: 50 OHMS
 VRMS: 500 V SEA LEVEL

MECHANICAL

MATERIALS BODY: NICKEL PLATED BRASS
 MALE CONTACTS: BRASS
 FEMALE CONTACTS: BeCu
 GASKETS: SILICONE RUBBER
 INSULATOR: TEFLON

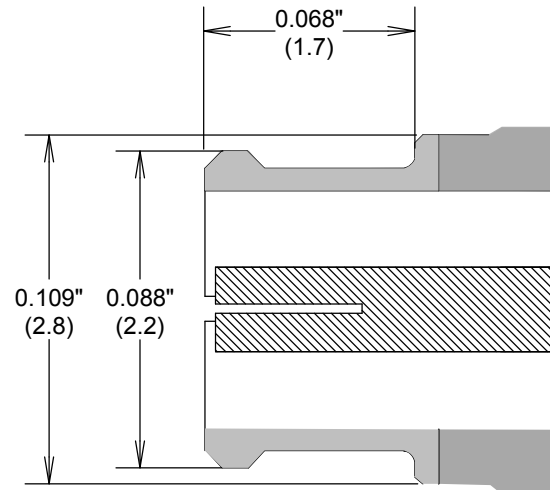

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

MINI-SMP-FEMALE

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	MINI-SMP-F CONNECTOR	--

ALL DIMENSIONS IN inches(mm) Typical

SCALE

SHEET