

0 to 63 dB Programmable TTL Controlled Step Attenuator with a 1 dB Step SMA Female to SMA Female from 200 MHz to 6 GHz

The FMAT5009 is a 6 Bit Programmable Attenuator which operates over the frequency range of 200 MHz to 6000 MHz. The 50 ohm design supports TTL control logic and has an attenuation range that covers 0 to 63 dB in 1 dB steps. Attenuation steps are 1, 2, 4, 8, 16, and 32 dB. Insertion loss is 5.5 dB maximum with a maximum RF input power +20 dBm. Additional typical performance includes +/- 1.0 dB attenuation accuracy and switching speed of 0.7 microseconds. The DC supply is +5 Vdc @ 50 mA. The compact and rugged package design supports SMA female RF input/output connectors, and a 10 pin male connector socket for DC and TTL controls. A mating DC cable connector plug assembly (model FMCA1325-24) is available in stock as an accessory. The FMAT5009 has an operational temperature range of -40°C to +85°C.

Electrical Specifications (Values at 25°C, sea level)

Description	Min	Typ	Max	Unit
Frequency Range	0.2		6	GHz
Mean Attenuation Range	0		63	dB
Insertion Loss			5.5	dB
Input VSWR			1.8:1	
Survival Power Average			+25	dBm
Power Handling Capacity			+20	dBm
Step Size	1			dB
Switching Time			1	us
Logic Input				
Logic "0" (Bit Off) @ 5µA	0		1.5	Volts
Logic "1" (Bit On) @ 800µA	2		5	Volts

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Freq. Range	0.2-0.8	0.8-2	2-6			GHz
Insertion Loss, Typ	3	3.6	5			dB
VSWR, Max	1.8	1.5	1.5			

Electrical Specification Notes:
1, 2, 4, 8, 16, and 32 dB bit Steps

Mechanical Specifications

Size

Weight	0.121 lbs [54.88 g]
Connector 1	SMA Female
Connector 2	SMA Female



Features:

- 6 Bit Programmable Attenuator
- 200 to 6000 MHz Bandwidth
- 0-63 dB attenuation
- 1 dB Step Size
- 50 Ohms
- Switching Speed: 0.7 microseconds typ
- Insertion Loss: 5.5 dB max
- Attenuation Accuracy: +/- 1 dB typ
- DC Bias: +5 Vdc @ 50 mA
- SMA female connectors

Applications:

- Electronic Warfare
- Electronic Countermeasures
- Microwave Radio
- VSAT
- Radar
- Fiber Optic
- Space Systems
- Test Instrumentation
- Telecom Infrastructure

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Environmental Specifications

Temperature


Operating Range -40 to +85 deg C




Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

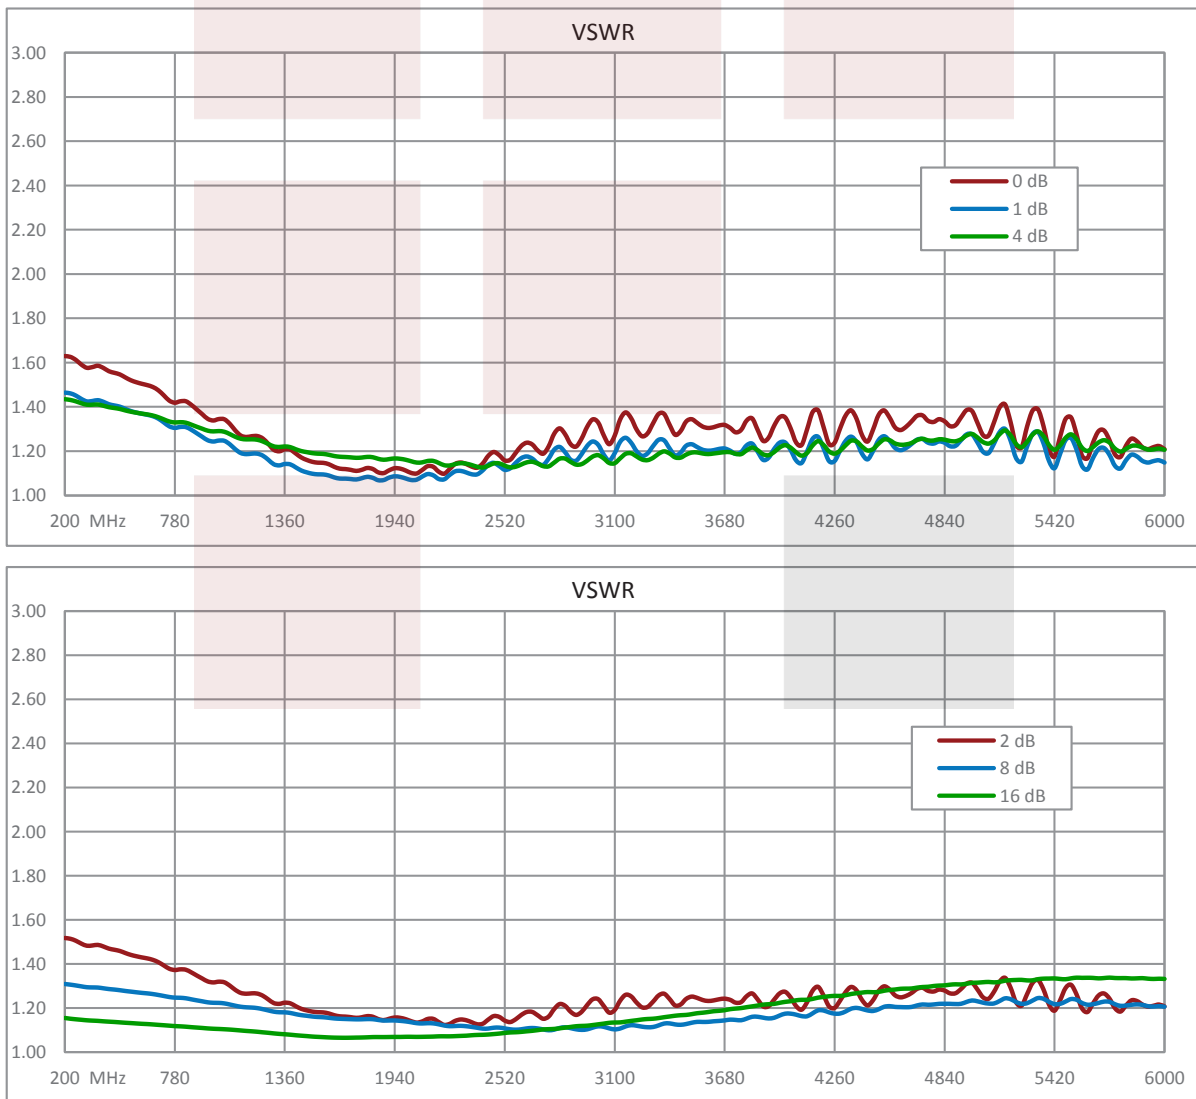

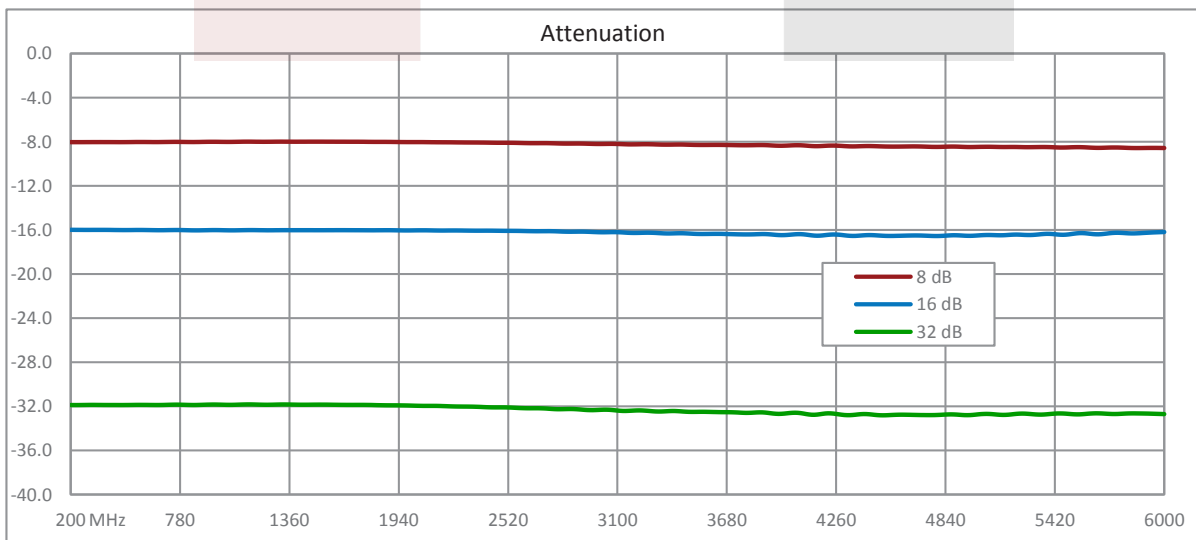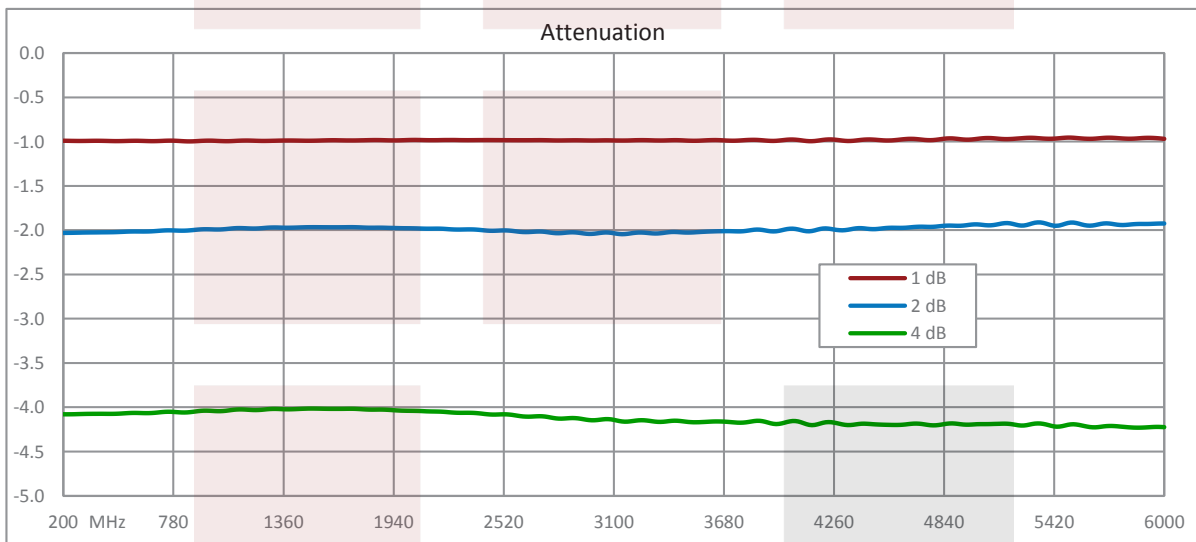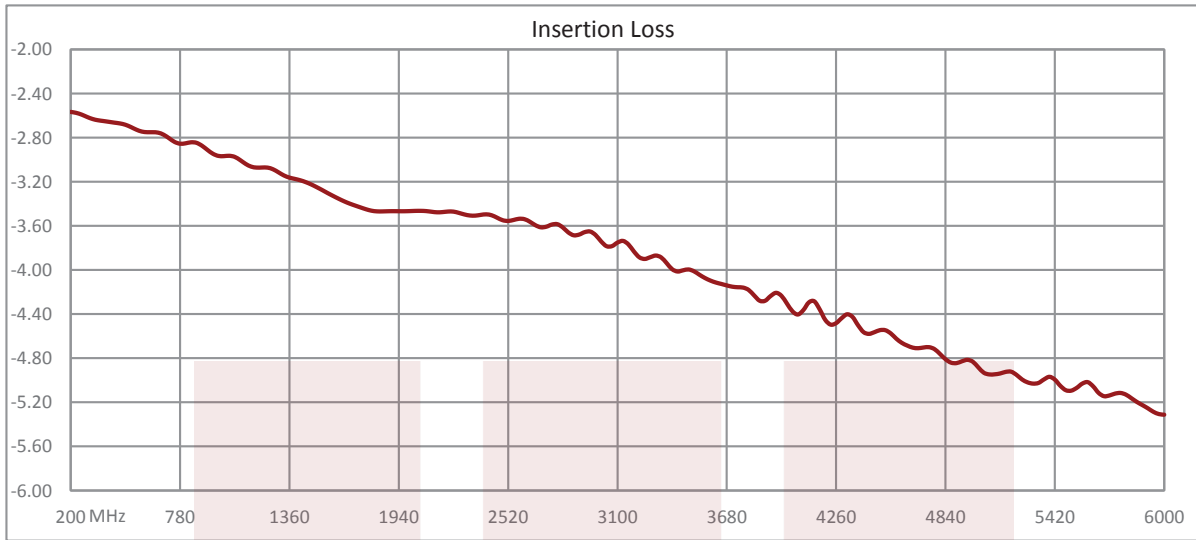




0 to 63 dB Programmable TTL Controlled Step Attenuator with a 1 dB Step SMA Female to SMA Female from 200 MHz to 6 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [0 to 63 dB Programmable TTL Controlled Step Attenuator with a 1 dB Step SMA Female to SMA Female from 200 MHz to 6 GHz FMAT5009](#)

URL: <https://www.fairviewmicrowave.com/63-db-ttl-controlled-step-attenuator-sma-female-fmat5009-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

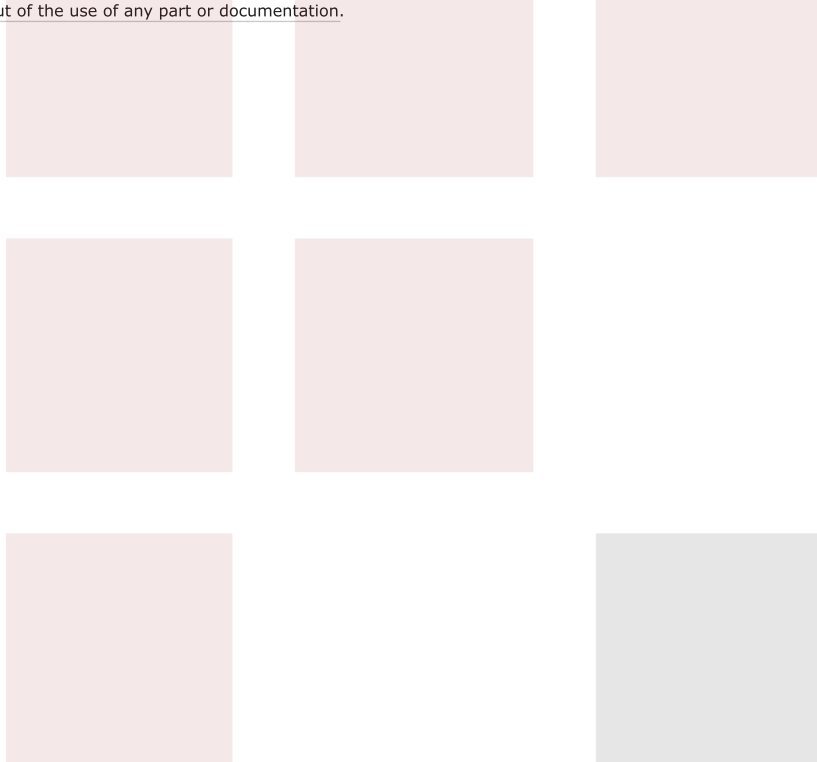

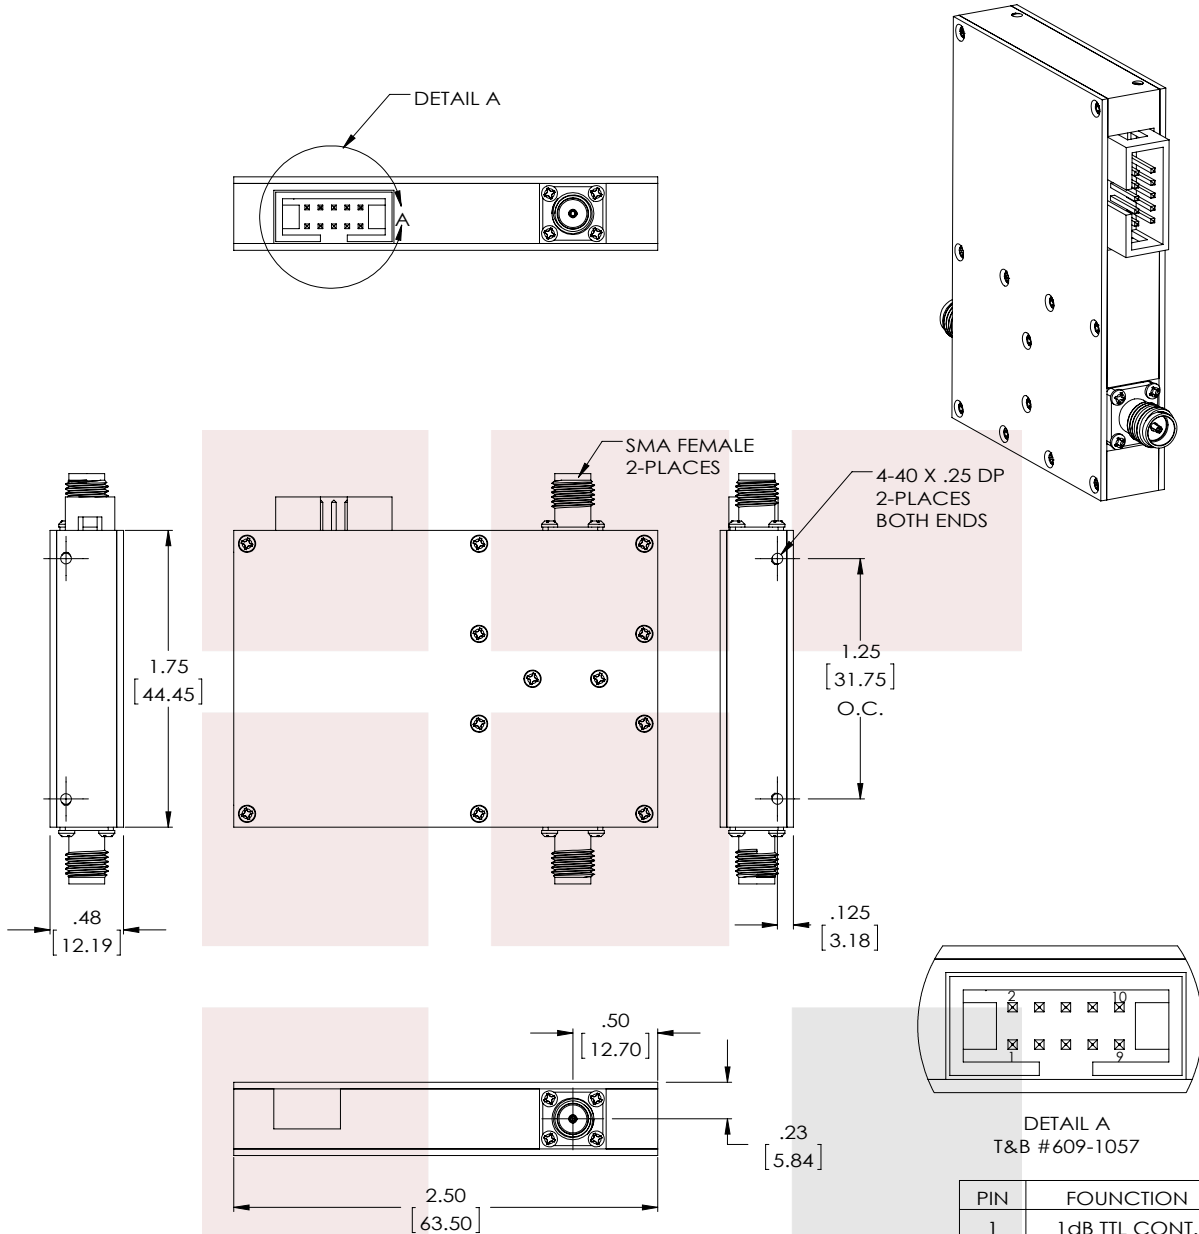

DETAIL A
T&B #609-1057

PIN	FOUNCTION
1	1dB TTL CONT.
2	2dB TTL CONT.
3	4dB TTL CONT.
4	8dB TTL CONT.
5	16dB TTL CONT.
6	32dB TTL CONT.
7	NO CONNECTION
8	NO CONNECTION
9	DC SUPPLY
10	GROUND

STANDARD TOLERANCES	
.XX	±0.010
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 0 to 63 dB Programmable TTL Controlled Step Attenuator with a 1 dB Step SMA Female to SMA Female from 200 MHz to 6 GHz		DWG NO FMAT5009		CAGE CODE 3FKR5	
		CAD FILE 041217	SHEET	SCALE N/A	SIZE A