

FMC0103195 DATA SHEET

N Male to TNC Male Cable LMR-195 Coax

Electrical Specifications

Min	Тур	Мах	Units		
DC		2.5 GHz			
	1.35:1				
	83	%			
90			dB		
	24.5 [80.3	D.38] pF/ft [pF/m]			
	0.061 [0.2	2]	uH/ft [uH/m		
ductor	5.36 [17.59	9] Ω/1000ft [Ω/Km]			
nductor	5.9 [19.36	.36] Ω/1000ft [Ω/Km]			
ons	0.8125	in [20.64	mm]		
		-	-		
al and Plating	50 Ohm Solid Copper PE (F) 2 Tinned (Aluminu PE, Blac	Copper Im Tape :k	nm]		
Connect	tor 1	Cor	Connector 2		
N Ma	N Male		TNC Male		
Standard		S	Standard		
50 Ohms		5	50 Ohms		
Beryllium Copper, Gold		Berylliu	Beryllium Copper, Gold		
= •· J ··· • • •	PTFE		PTFE		
			PTFE		
	DC 90 ductor ons al and Plating Connect N Ma Standa	DC 83 90 24.5 [80.3 0.061 [0.2 ductor 5.36 [17.59 nductor 5.9 [19.36 0ns 0.8125 0.8125 0.8125 0.8125 0.8125 0.8125 0.8125 0.8125 0.8125 0.8125 0.8125 0.8125 0.8125 0.195 ir	DC 2.5 1.35:1 1.35:1 83 90 24.5 [80.38] 0.061 [0.2] ductor 5.36 [17.59] inductor 5.9 [19.36] ons 0.8125 in [20.64 al and Plating 0.8125 in [20.64 LMR-195 50 Ohms Solid Copper PE (F) 2 Tinned Copper PE, Black 0.195 in [4.95 n O.195 in [4.95 n N Male T Standard S		



Configuration:

- N Male
- TNC Male
- LMR-195

Er

Temperature **Operating Range**

-65 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Typical Performance Data

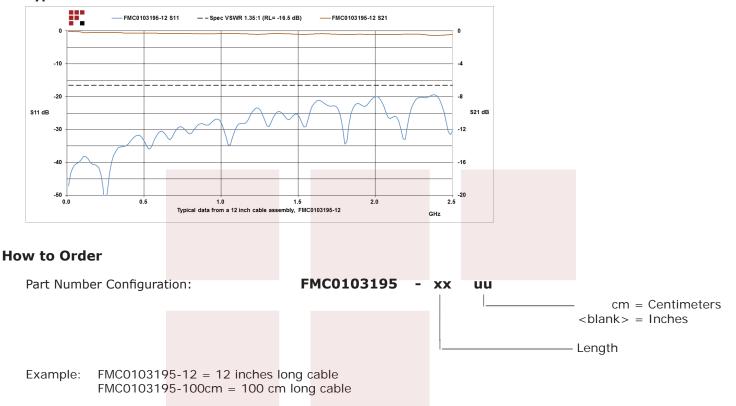

N Male to TNC Male Cable LMR-195 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: N Male to TNC Male Cable LMR-195 Coax FMC0103195


URL: https://www.fairviewmicrowave.com/n-male-tnc-male-cable-Imr195-coax-fmc0103195-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





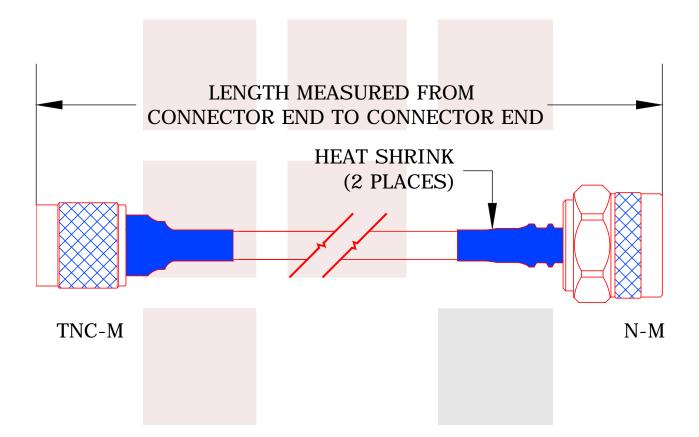

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
N Male to TNC Male Cable LMR-195 Coax	DWG NO FMC0103195			CAGE CODE 3FKR5			
	CAD FILE 101314	SHEET	SCAL	E N/A	SIZE A	5568	

1130 Junction Dr. #100 Allen, TX 75013 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689