

FMC1325085 **DATA SHEET**

SMA Female to Mini SMP Female Cable FM-F086 Coax

Electrical Specifications

Description	Min	Тур	Max	Units			
Frequency Range	DC		18	GHz			
VSWR		1.35:1					
Velocity of Propagation		70.6		%			
Capacitance	28	28.95 [94.98]					

Mechanical Specifications

Cable Assembly

Weight 0.0313 lbs [14.2 g]

Cable

Cable Type FM-F086 Impedance 50 Ohms Solid Inner Conductor Type Inner Conductor Material and Plating

Dielectric Type PTFE

Number of Shields Shield Layer 1 Shield Layer 2 Jacket Material Jacket Diameter

Copper, Silver

Silver Plated Copper Tape

Silver Plated Copper Braid FEP, Blue

0.104 in [2.64 mm]



Configuration:

- SMA Female
- Mini SMP Female
- FM-F086

Connectors

Description	Connector 1	Connector 2		
Туре	SMA Female	Mini SMP Female		
Polarity	Standard	Standard		
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Beryllium Copper, Gold	Beryllium Copper, Gold		
Contact Plating Spec.	30μ″ Min	MIL-G-45204		
Dielectric Type	PTFE	PTFE		
Body Material & Plating	Gold	Beryllium Copper, Gold		
Body Plating Spec.		MIL-G-45204		

Environmental Specifications

Temperature

Operating Range -65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013


Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Typical Performance Data

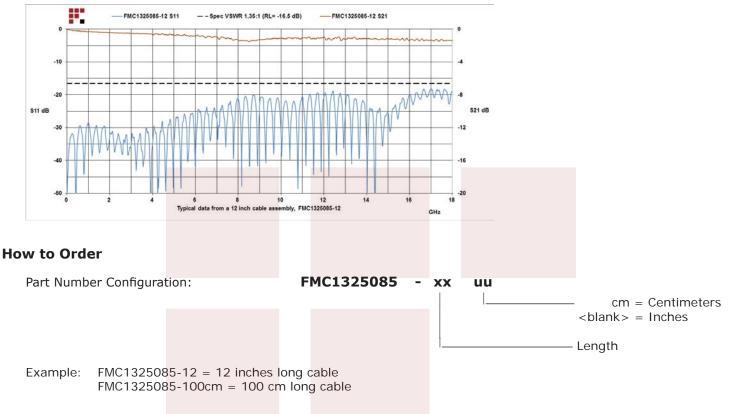

SMA Female to Mini SMP Female Cable FM-F086 Coax from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link to obtain additional part information: SMA Female to Mini SMP Female Cable FM-F086 Coax FMC1325085

URL: https://www.fairviewmicrowave.com/sma-female-mini-smp-female-cable-hs086-coax-fmc1325085-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.





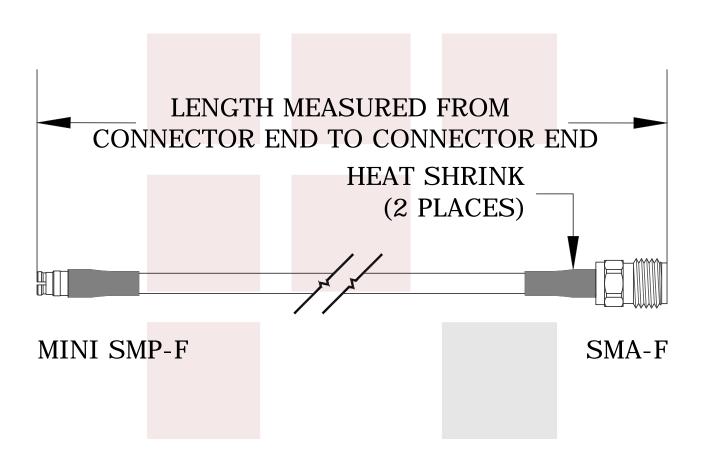

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
TITLE SMA Female to Mini SMP Female Cable FM-F086 Coax	DWG NO FMC1325085			CAGE CODE 3FKR5		
	CAD FILE 103014	SHEET	SCALE N	J/A SIZE A	5568	