

## Test 2.92mm Male to 2.92mm Female Cable FM160FLEX Coax



### FMC2949914

#### Configuration

- Connector 1: 2.92mm Male
- Connector 2: 2.92mm Female
- Cable Type: FM-160FLEX
- Coax Flex Type: Flexible

#### Features

- Max Frequency 40 GHz
- Shielding Effectivity > 90 dB
- 76% Phase Velocity
- Triple Shielded
- ETFE Jacket

#### Applications

- General Purpose
- Test & Measurement
- Laboratory Use

#### Description

The 2.92mm male to 2.92mm female cable using FM160FLEX coax, part number FMC2949914, from Fairview Microwave is in-stock and ships same day. This Fairview 2.92mm to 2.92mm cable assembly has a male to female gender configuration with 50 ohm flexible FM-160FLEX coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC2949914 2.92mm male to 2.92mm female cable assembly operates to 40 GHz. The triple shielding of this Fairview cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	90			dB
Capacitance		25 [82.02]		pF/ft [pF/m]
Inductance		66 [216.54]		uH/ft [uH/m]

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Power Handling (Max.)	1,520	1,070	610	420	290	Watts

#### Specifications by Frequency

Test 2.92mm Male to 2.92mm Female  
Cable FM160FLEX Coax



**FMC2949914**

Part Number	Length	Description	F1	F2	F3	F4	F5	Units	Weight (lbs)
			Frequency		2500	5000	10000	20000	
FMC2949914	Custom Lengths Available	Insertion Loss (Typ.)	0.2	0.293	0.429	0.643	0.973	dB/ft	
			0.66	0.97	1.41	2.11	3.2	dB/m	
FMC2949914-36	36 Inch	Insertion Loss (Typ.)	0.77	1.07	1.52	2.21	3.28	dB	0.113
FMC2949914-48	48 Inch	Insertion Loss (Typ.)	0.97	1.37	1.95	2.86	4.25	dB	0.14
FMC2949914-100CM	100 Meters	Insertion Loss (Typ.)	0.82	1.16	1.64	2.39	3.55	dB	0.115
FMC2949914-150CM	150 Meters	Insertion Loss (Typ.)	1.15	1.64	2.34	3.45	5.15	dB	0.118

The insertion loss data for the base model does not include loss due to the connectors. Each length includes insertion loss due to the connectors.

Loss due to Connector 1: 0.04\*SQRT(FGHz) dB  
 Loss due to Connector 2: 0.1 dB  
 Base Weight: 0.014 pounds  
 Additional Weight per Inch: 0.00234 pounds

**Mechanical Specifications**

**Cable Assembly**

Width/Diameter 0.33 in [8.38 mm]  
 Weight 0.014 lbs [6.35 g]

**Cable**

Cable Type FM-160FLEX  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PPO  
 Number of Shields 3  
 Shield Layer 1 Silver Plated Copper  
 Shield Layer 2 Aluminum Tape  
 Shield Layer 3 Silver Plated Copper  
 Jacket Material ETFE, Gray  
 Jacket Diameter 0.16 in [4.06 mm]  
 One Time Minimum Bend Radius 0.8 in [20.32 mm]  
 Repeated Minimum Bend Radius 0.24 in [6.1 mm]  
 Typical Flex Cycles 10,000

Test 2.92mm Male to 2.92mm Female  
Cable FM160FLEX Coax



**FMC2949914**

**Connectors**

Description	Connector 1	Connector 2
Type	2.92mm Male	2.92mm Female
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Color	SV	SV
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	ASTM-B488 50µ In. Minimum	ASTM-B488 50µ In. Minimum
Dielectric Type	PPO	PPO
Outer Conductor Material and Plating		Passivated Stainless Steel
Outer Conductor Plating Specification		SAE-AMS-2700
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	
Coupling Nut Plating Specification	SAE-AMS-2700	
Hex Size	5/16 Inch	
Torque	8 in-lbs 0.9 Nm	

Mechanical Specification Notes:  
IEEE-STD-P287. Figure G.4. Except Conductor Tolerances and Contact Retension.

**Environmental Specifications**

Operating Range Temperature -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:


Test 2.92mm Male to 2.92mm Female  
Cable FM160FLEX Coax



**FMC2949914**

**Typical Performance Data**

**How to Order**

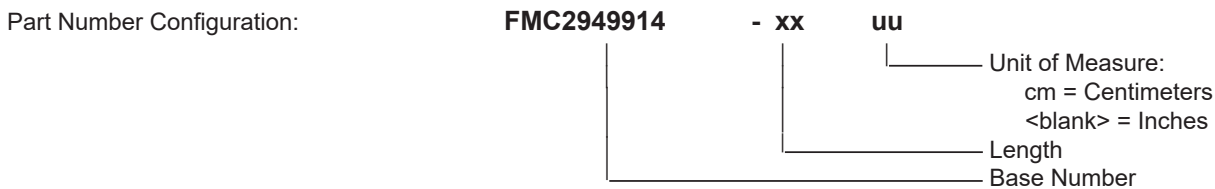

Example: FMC2949914-12 = 12 inches long cable  
FMC2949914-100cm = 100 cm long cable

Test 2.92mm Male to 2.92mm Female Cable FM160FLEX Coax from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [Test 2.92mm Male to 2.92mm Female Cable FM160FLEX Coax FMC2949914](https://www.fairviewmicrowave.com/test-2.92mm-male-to-2.92mm-female-cable-fm160flex-coax-fmc2949914-p.aspx)

URL: <https://www.fairviewmicrowave.com/test-2.92mm-male-to-2.92mm-female-cable-fm160flex-coax-fmc2949914-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMC2949914 CAD Drawing

Test 2.92mm Male to 2.92mm Female Cable FM160FLEX Coax

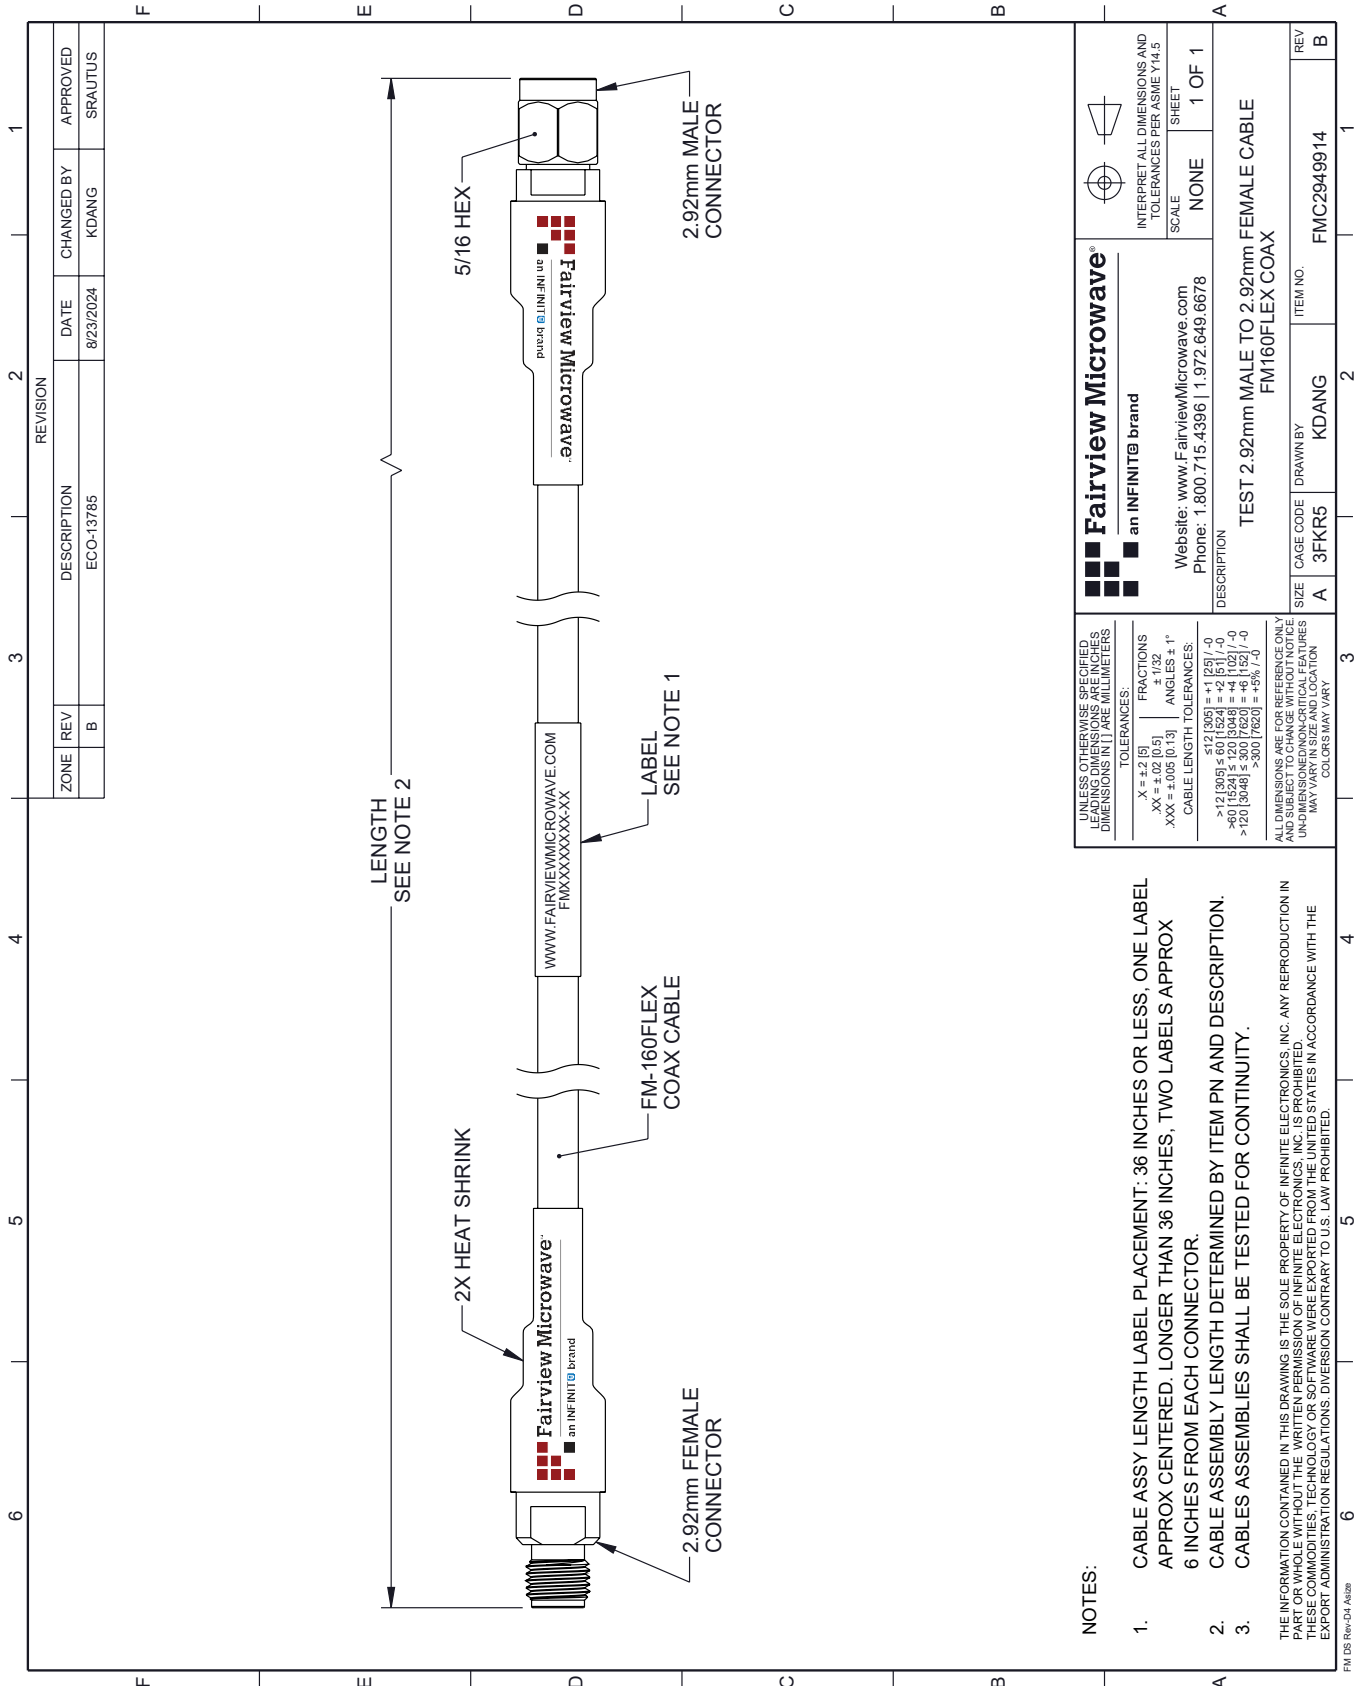

REVISION		DATE	CHANGED BY	APPROVED
ZONE	REV			
	B	8/23/2024	KDANG	SRAUTUS
DESCRIPTION				
ECO-13785				

 <b>Fairview Microwave</b> an INFINITO brand Website: www.FairviewMicrowave.com Phone: 1.800.715.4396   1.972.649.6678		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5 SCALE NONE SHEET 1 OF 1
DESCRIPTION <b>TEST 2.92mm MALE TO 2.92mm FEMALE CABLE FM160FLEX COAX</b>		
SIZE	CAGE CODE	ITEM NO.
A	3FKR5	FMC2949914
REV	B	

- NOTES:**
- CABLE ASSY LENGTH LABEL PLACEMENT: 36 INCHES OR LESS, ONE LABEL APPROX CENTERED. LONGER THAN 36 INCHES, TWO LABELS APPROX 6 INCHES FROM EACH CONNECTOR.
  - CABLE ASSEMBLY LENGTH DETERMINED BY ITEM PN AND DESCRIPTION. CABLES ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
- UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE IN INCHES DIMENSIONS IN [ ] ARE MILLIMETERS
- TOLERANCES:  
 .X = ±.2 [5]  
 .XX = ±.02 [0.5]  
 .XXX = ±.005 [0.13]
- FRACTIONS ± 1/32  
 ANGLES ± 1°
- CABLE LENGTH TOLERANCES:  
 ≤12 [305] ±.1 [2.5] / -0  
 >12 [305] ≤ 60 [1524] = ±.2 [5] / -0  
 >60 [1524] ≤ 120 [3048] = ±.4 [102] / -0  
 >120 [3048] ≤ 300 [7620] = ±.8 [20] / -0
- ALL DIMENSIONS ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION  
 COLORS MAY VARY
- THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.