

TNC Female (Jack) Bulkhead Connector For LL160 Cable, Clamp/Solder

TNC Female Bulkhead Standard Bulkhead Connector Clamp/Solder Attachment for LL160 Cable, part number FMCN1469, from Fairview Microwave is in-stock and ships same day. This TNC female connector operates up to a maximum frequency of 18 GHz and offers excellent VSWR of 1.16:1. Fairview's FMCN1469 bulkhead TNC connector enables designers to make external connections on product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Fairview's TNC female bulkhead connector FMCN1469 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		18	GHz
VSWR			1.16:1	
DWV (AC)			1,500	Vrms

Electrical Specification Notes:
 Insertion Loss is $0.04 * \sqrt{\text{Freq GHz}}$

Mechanical Specifications

Weight 0.037 lbs [16.78 g]

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold ASTM-B488
Insulation	PTFE	
Outer Conductor	Passivated Stainless Steel	
Body	Passivated Stainless Steel	
Coupling Nut	Passivated Stainless Steel	
Crimp Sleeve	Brass	Gold ASTM-B488
O-Ring	Silicone Rubber	



Configuration:

- TNC Female Connector
- 50 Ohms
- Straight Body Geometry
- LL160 Interface Type
- Clamp/Solder Attachment
- Bulkhead

Features:

- Operating Frequency of 18 GHz Max.
- Excellent VSWR of 1.16:1
- Gold Plated Beryllium Copper Contact
- Contact plating according to ASTM-B488

Applications:

- General Purpose Test
- Rack and Panel Mount Applications
- Custom Cable Assemblies

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Environmental Specifications

Temperature

Operating Range -65 to 165 deg C


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data


Notes:

Assembly Instruction


1. TRIM CABLE TO EXPOSE DIELECTRIC AND BRAIDS AS SHOWN.

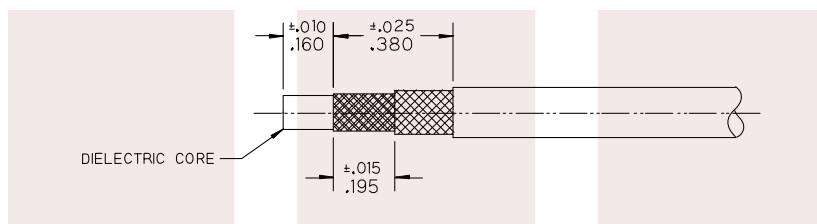

2.
 - A. INSTALL O-RING ONTO CLAMP NUT OVER CABLE IN ORIENTATION SHOWN.
 - B. INSERT CABLE INTO SOLDER FERRULE UNTIL INNER BRAID IS SEATED THEN SOLDER CABLE BRAIDS TO FERRULE WHERE SHOWN.
 - C. TRIM CABLE DIELECTRIC FLUSH WITH FACE OF SOLDER FERRULE.
 - D. SLIDE DIELECTRIC STOP OVER CABLE CENTER CONDUCTOR AND SOLDER CONTACT FLUSH TO STOP TO DIMENSION SHOWN.

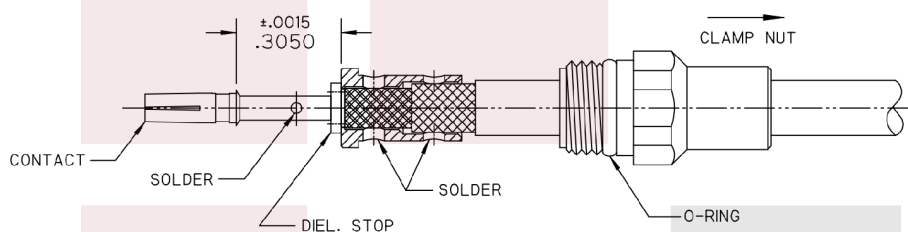

3. INSERT CABLE/ CONTACT SUB-ASSEMBLY UNTIL SEATED AND TIGHTEN CLAMP NUT TO 25-35 IN-LBS.

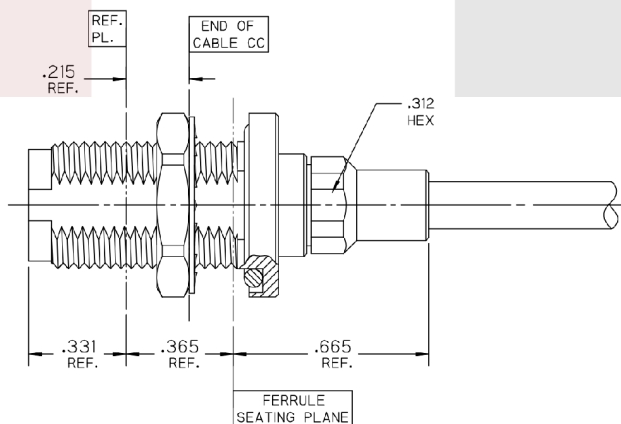

TNC Female (Jack) Bulkhead Connector For LL160 Cable, Clamp/Solder from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [TNC Female \(Jack\) Bulkhead Connector For LL160 Cable, Clamp/Solder FMCN1469](#)

URL: <https://www.fairviewmicrowave.com/tnc-female-ll160-connector-fmcn1469-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



