

## Mini SMP Female VITA 67 Connector Solder Attachment for FM-SR047CU, FM-SR047TB and FM-SR047ALTN Cable



### FMCN1535

#### Configuration

- Mini SMP Female Connector
- 50 Ohms
- Straight Body Geometry
- Connector Interface Types: FM-SR047CU, FM-SR047TB, FM-SR047ALTN
- VITA 67 Design

#### Features

- Operating Frequency of 40 GHz Max.
- Good VSWR of 1.45:1
- Blind Mate Connector
- Gold Plated Beryllium Copper Contact
- Contact plating according to ASTM B488
- Coaxial interconnects on VPX platforms
- Standard MIL-STD-348 SMPM interface
- Rugged Stainless Steel construction
- Accepts 0.047" cable contacts for end to end solution

#### Applications

- General Purpose Test
- Custom Cable Assemblies
- Robust and Rugged high speed cabled solution
- VITA 67 Backplane
- High Density Applications

#### Description

FMCN1535 Mini SMP female coaxial connector from Fairview Microwave has an interface type of FM-SR047CU, FM-SR047TB, FM-SR047ALTN and a 50 Ohm impedance. This Mini SMP female connector utilizes a solder attachment for the contact. Our female Mini SMP coaxial connector provides a minimum frequency of DC and a maximum frequency of 40 GHz.

Mini SMP female coaxial RF connector has a PEI dielectric and a VSWR of 1.45:1. This Fairview Microwave Mini SMP coaxial connector has a brass body with gold plating. You can find this Mini SMP female coaxial connector datasheet specifications below.

Fairview Microwave female Mini SMP connector purchases will ship the same day. Our Mini SMP female FMCN1535 connector is part of over one million RF, microwave and millimeter wave components in stock and ready for same-day shipment worldwide. We also build custom Mini SMP cable assemblies that will ship quickly from our location.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.45:1	
Insertion Loss			0.65	dB
Dielectric Withstanding Voltage (AC)			325	Vrms
Inner Conductor DC Resistance			6	mOhms
Outer Conductor DC Resistance			5	mOhms
Insulation Resistance	5,000			MOhms
Impedance		50		Ohms

#### Mechanical Specifications

##### Size

Length	0.48 in [12.19 mm]
Width	0.15 in [3.81 mm]
Height	0.15 in [3.81 mm]
Weight	0.0016 lbs [0.73 g]

Mini SMP Female VITA 67 Connector Solder Attachment for FM-SR047CU, FM-SR047TB and FM-SR047ALTN Cable



**FMCN1535**

Mating Cycles	500 Cycles
Engagement Force	4.25lbs [1.93kg]
Disengagement Force	3.5lbs [1.59kg]

**Material Specifications**

Description	Material	Plating
Contact	Beryllium Copper	Gold ASTM B488
Contact Spring	Passivated Stainless Steel	
Insulation	PEI	
Outer Conductor	Brass	Gold ASTM B488
Body	Brass	Gold ASTM B488
Retaining Ring	Beryllium Copper	Nickel SAE-AMS-QQ-N-290

**Environmental Specifications**

<b>Temperature</b>	
Operating Range	-55 to +105 deg C
Humidity	1,000 megohms within 5 minutes after removal from humidity, tested per MIL-STD-202, Method 106
Shock	Sawtooth pulse of 100 g 6ms per MIL-STD-202, Method 213, Condition I
Vibration	MIL-STD-202, Method 214, Test Condition I, Curve D
Thermal Shock	MIL-STD-202, Method 107, Test Condition A

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

## Mini SMP Female VITA 67 Connector Solder Attachment for FM-SR047CU, FM-SR047TB and FM-SR047ALTN Cable



### FMCN1535

Mini SMP Female VITA 67 Connector Solder Attachment for FM-SR047CU, FM-SR047TB and FM-SR047ALTN Cable from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: [Mini SMP Female VITA 67 Connector Solder Attachment for FM-SR047CU, FM-SR047TB and FM-SR047ALTN Cable FMCN1535](#)

URL: <https://www.fairviewmicrowave.com/mini-smp-female-pe-p047-pe-p047fl-pe-047sr-pe-sr047fl-pe-sr047al-connector-fmcn1535-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMCN1535 CAD Drawing

Mini SMP Female VITA 67 Connector Solder Attachment for FM-SR047CU, FM-SR047TB and FM-SR047ALTN Cable

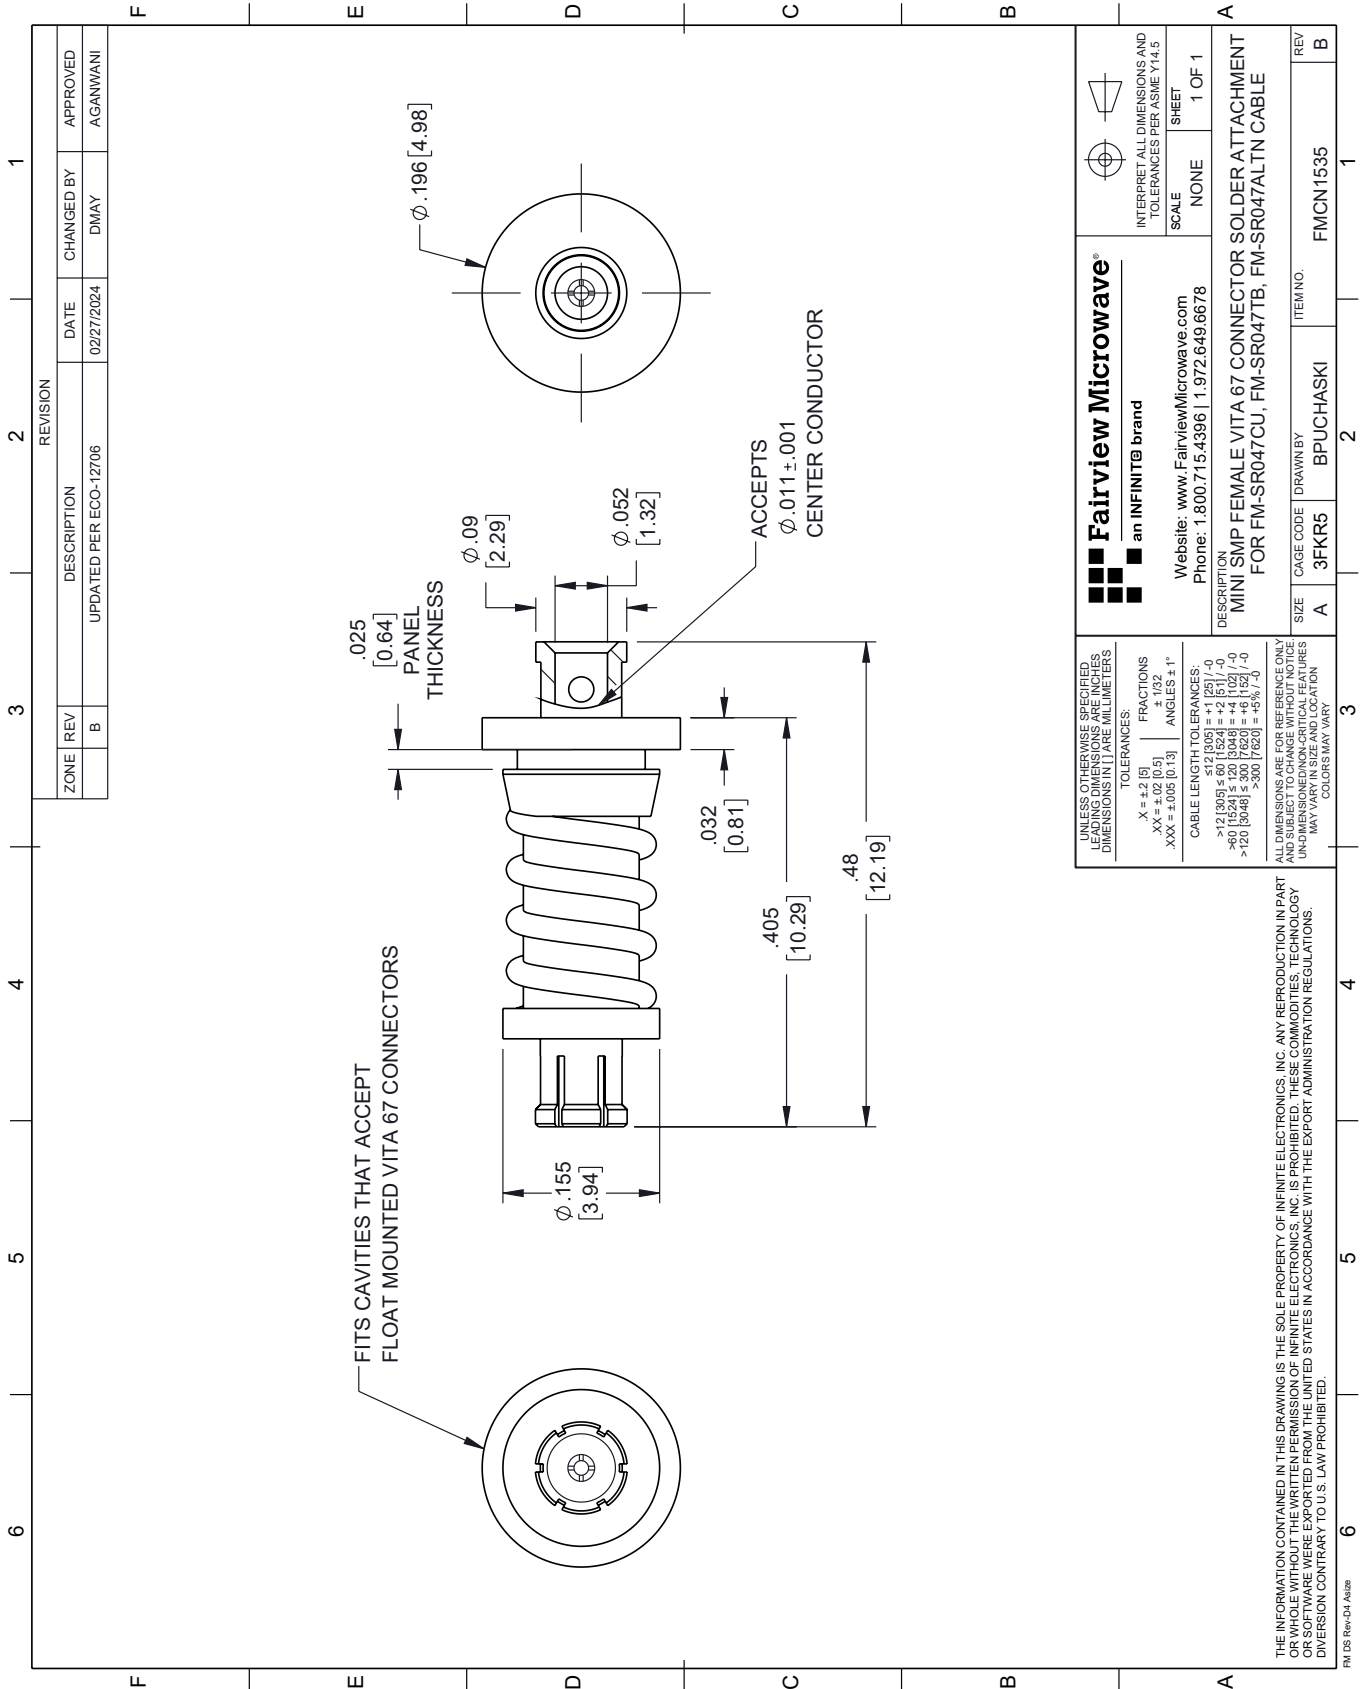

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	UPDATED PER ECO-12706	02/27/2024	DMAY	AGANWANI

**Fairview Microwave®**  
an INFINIT® brand

Website: [www.FairviewMicrowave.com](http://www.FairviewMicrowave.com)  
Phone: 1.800.715.4396 | 1.972.649.6678

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE: NONE  
SHEET: 1 OF 1

DESCRIPTION:  
**MINI SMP FEMALE VITA 67 CONNECTOR SOLDER ATTACHMENT FOR FM-SR047CU, FM-SR047TB, FM-SR047ALTN CABLE**

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	3FKR5	BPUCHASKI	FMCN1535

REV: B

UNLESS OTHERWISE SPECIFIED, LEADING DIMENSIONS ARE IN INCHES AND DIMENSIONS IN [ ] ARE IN MILLIMETERS.

TOLERANCES:  
.X = ±.2 [5]      FRACTIONS ± 1/32  
.XX = ±.02 [0.5]      ANGLES ± 1°  
.XXX = ±.005 [0.13]

CABLE LENGTH TOLERANCES:  
>12 [305] ≤ 60 [1524] = ±.1 [25] / -0  
>60 [1524] ≤ 120 [3048] = ±.4 [102] / -0  
>120 [3048] ≤ 300 [7620] = ±.8 [20] / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, DIMENSIONS MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVISION CONTRARY TO U.S. LAW PROHIBITED.

FM DS Rev-D4 Alt2b