

**2.92mm PIN Diode Switch SPST From
 50 MHz to 40 GHz Rated at +30 dBm**

The FMSW2011 is an SPST REFLECTIVE PIN DIODE SWITCH that operates over a wide frequency band from 0.05 to 40 GHz. Electrical performance includes max. insertion loss of 6.5dB, max return loss of -5dB, min. isolation of 25dB, and max. switching speed of 150nsec. TTL-compatible driver circuitry is included for accurate logic control. The design requires dual voltage controls of +5 Vdc and -5 Vdc, with an operational temperature range of -30°C to +60°C. External connectors include solder terminals and 2.92mm female connectors.



Electrical Specifications

TTL Control Logic Off/Isolation: 0
 On/Low Loss: 1

Description	Min	Typ	Max	Units
Frequency Range	0.05		40	GHz
Impedance		50		Ohms
Return Loss			-5	dB
Insertion Loss			6.5	dB
Isolation	25			dB
Switching Time			150	ns
Input Power (CW)			1	Watts
Positive Operating Voltage		5		V
Negative Operating Voltage		-5		V
Operating Temperature	-30		+60	deg C

Electrical Specification Notes:
 Specified switching time includes TTL driver delay.

Mechanical Specifications

Length 1.2 in [30.48 mm]
 Width 1.2 in [30.48 mm]
 Height 0.6 in [15.24 mm]
 Package Type Connectorized Module
 Design SPST, Reflective
 RF Connector 2.92mm Female
 Control Connector Pin

Environmental Specifications

Temperature
 Operating Range -30 to +60 deg C
 ESD Sensitivity ESD Sensitive Material. Transport material in Approved ESD bags. Handle only in ESD Workstation.



Features:

- SPST Reflective Switch
- 0.05 GHz to 40 GHz
- Insertion Loss 6.5 dB max
- Isolation 25 dB min
- Power Input +30 dBm CW max

Applications:

- Test & Measurement
- Military Communication
- Commercial Communication

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
 www.fairviewmicrowave.com
 sales@fairviewmicrowave.com



Compliance Certifications (visit www.FairviewMicrowave.com for current document)


Plotted and Other Data

Notes:



Typical Performance Data

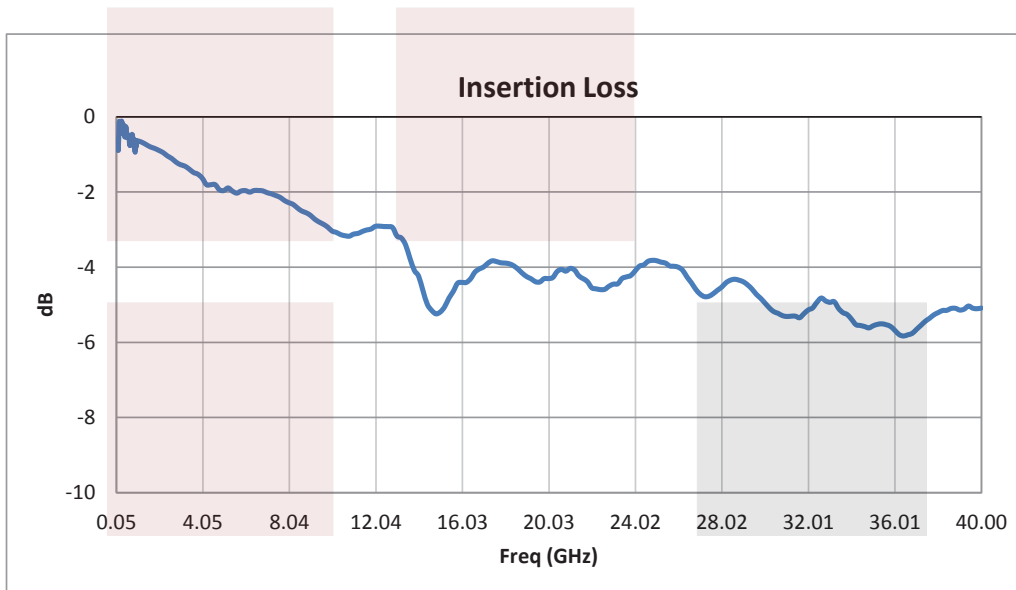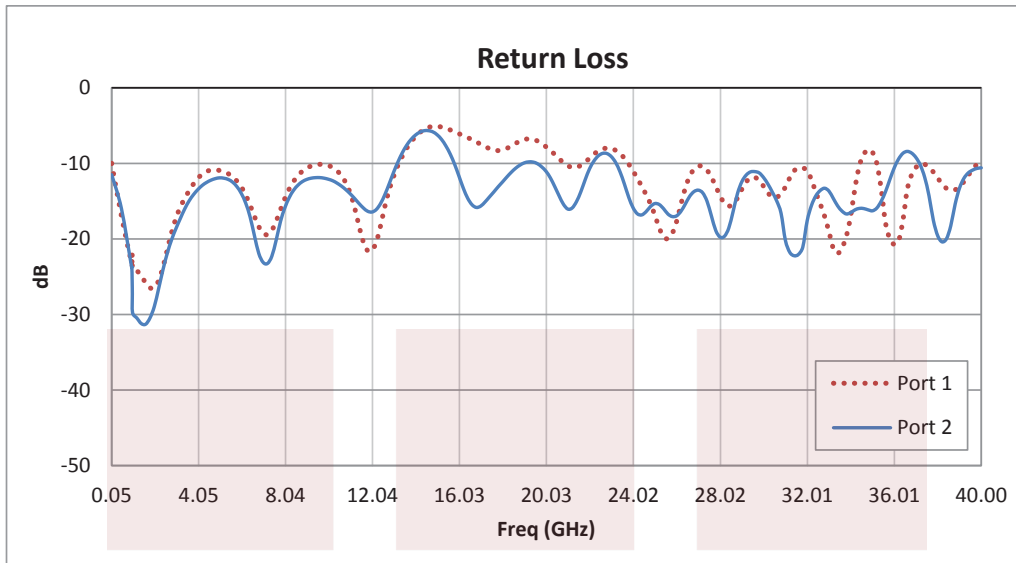

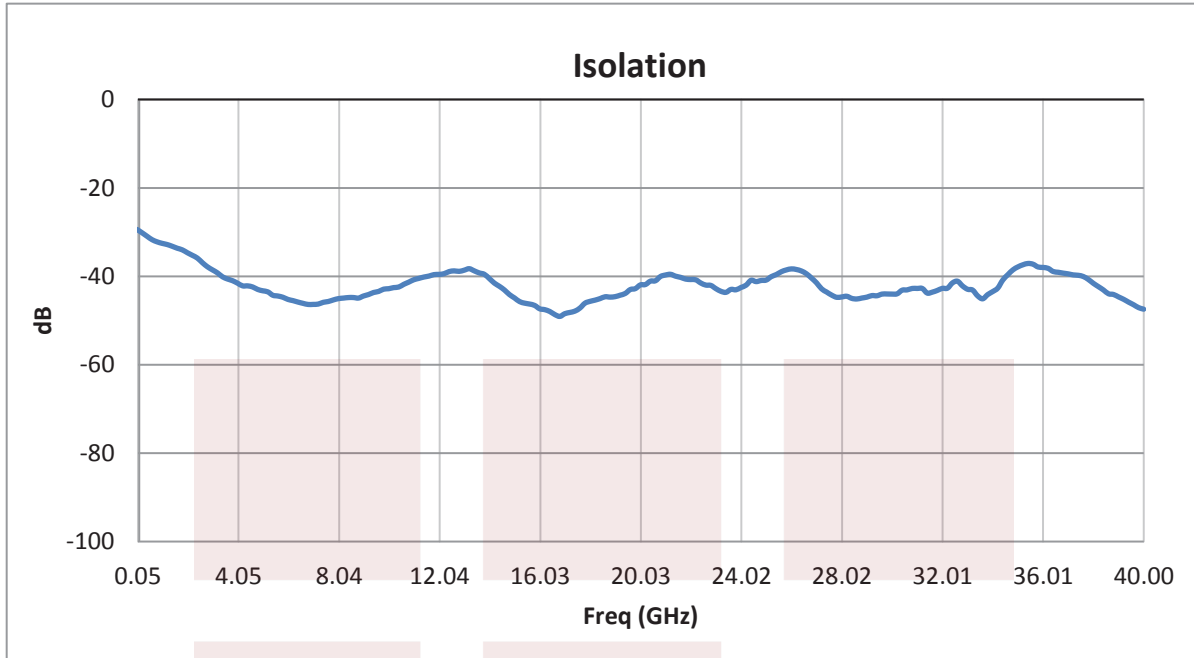


2.92mm PIN Diode Switch SPST From 50 MHz to 40 GHz Rated at +30 dBm from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [2.92mm PIN Diode Switch SPST From 50 MHz to 40 GHz Rated at +30 dBm FMSW2011](#)

URL: <http://www.fairviewmicrowave.com/2.92mm-pin-diode-switch-spst-50-mhz-40-ghz-rated-30-dbm-fmsw2011-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

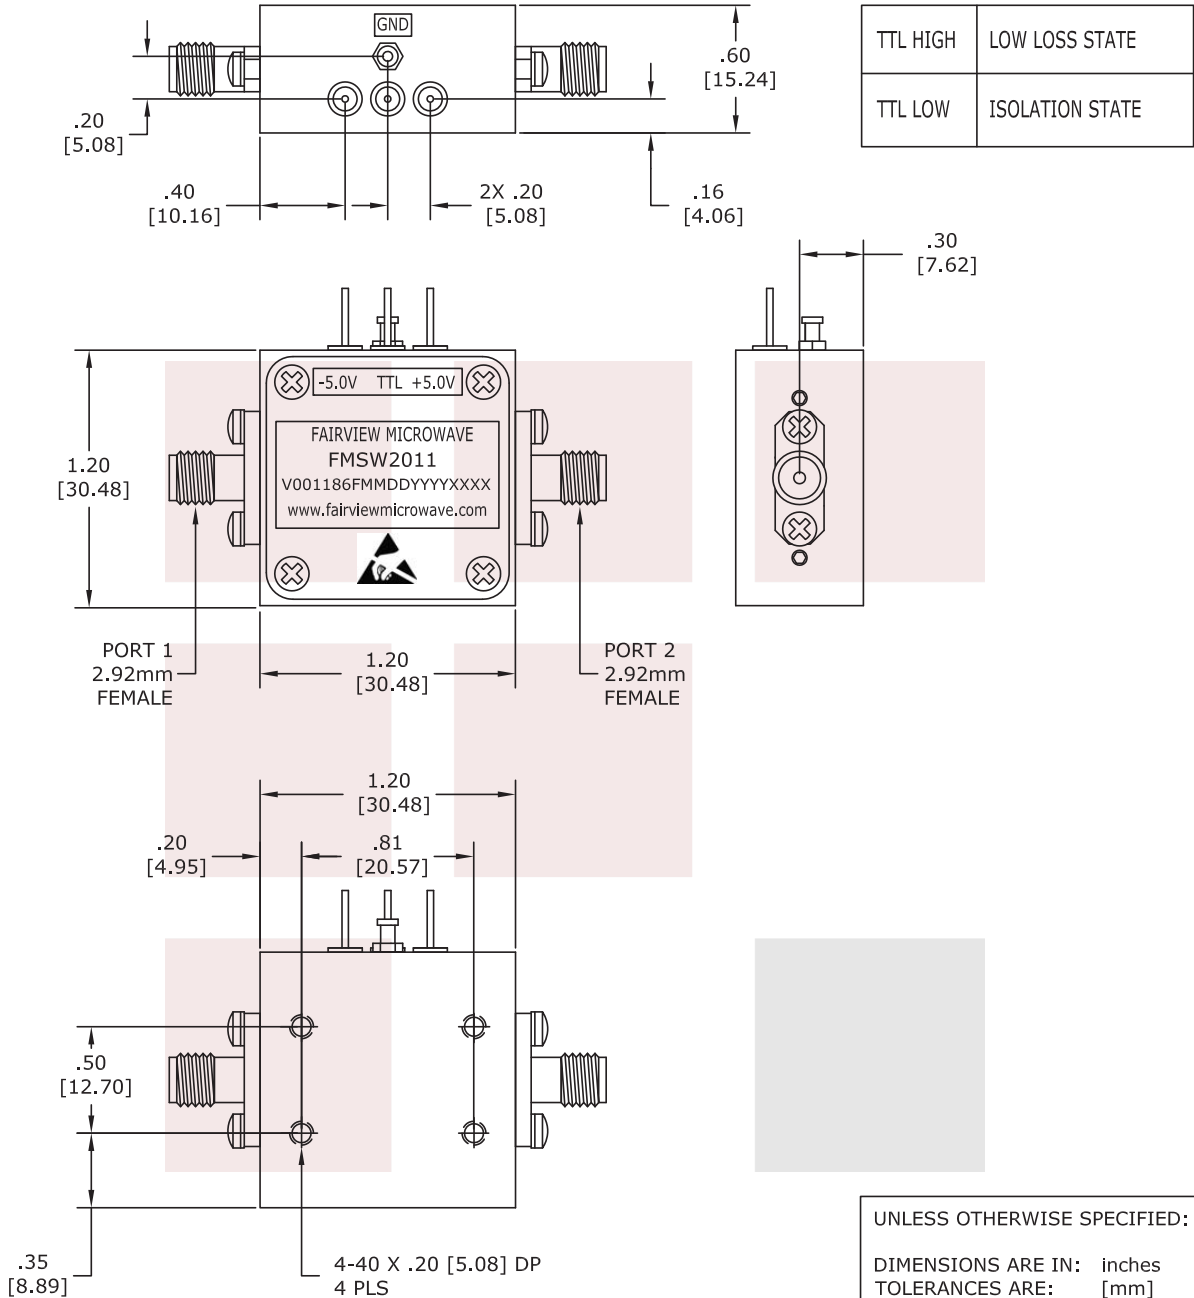

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 2.92mm PIN Diode Switch SPST From 50 MHz to 40 GHz Rated at +30 dBm		DWG NO FMSW2011		CAGE CODE 3FKR5	
CAD FILE	082615	SHEET	SCALE	N/A	SIZE A 2233