

### Waveguide Converter Mixer WR-19 from 40 GHz to 60 GHz, IF from DC to 20 GHz and LO Power of +13 dBm, UG-383/U-M Flange, U Band

The FMWGMX1003 is a WR-19 Waveguide Down Converter Mixer, operating across the U Band from 40 GHz to 60 GHz. The IF frequency band is DC to 20 GHz with a nominal LO drive level of +13 dB. Typical performance for the 50 Ohm double balanced mixer design includes 11 dB conversion loss and 30 dB isolation, with a maximum RF input power level of +17 dBm. The rugged and small size gold plated aluminum package supports a UG-383/U-M waveguide flange pattern at RF and LO ports, and an SMA female connector at the IF port. The mixer design is RoHS compliant and operates across a temperature range from -10°C to +45°C.



#### Electrical Specifications (@ +25°C)

Description	Min	Typ	Max	Units
Frequency Range	40		60	GHz
LO Frequency Range	40		60	GHz
IF Frequency Range	DC		20	GHz
RF to LO Isolation		30		dB
Conversion Loss		11		dB
LO Port Power		13		dBm

#### Electrical Specification Notes:

- Do not put any foreign objects inside the waveguide. Warranty will be voided
- Open and short-circuit loads are not recommended at the mixer output
- Ensure proper 50 Ohm load before applying RF

#### Mechanical Specifications

Size	
Length	1.5 in [38.1 mm]
Width/Diameter	1.5 in [38.1 mm]
Height	1.3 in [33.02 mm]
Weight	0.22 lbs [99.79 g]
Body Material and Plating	Aluminum, Gold

#### Configuration

Description	RF Port	LO Port	IF Port
Type	WR-19	WR-19	SMA Female
Waveguide Flange	UG-383/U-M	UG-383/U-M	

#### Environmental Specifications

##### Temperature

Operating Range	-10 to +45 deg C
Storage Range	-40 to +100 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

#### Features:



- WR-19 Waveguide Downconverter Mixer
- Band
- RF/LO Frequency: 40 GHz to 60 GHz
- IF Frequency: DC to 20 GHz
- U Band
- LO Drive: +13 dBm
- Conversion Loss: 11 dB typ
- Isolation: 30 dB typ
- RF Input Power: +17 dBm max
- 50 Ohm Double Balanced Design
- RF/LO Port Waveguide Flange UG-383/U-M
- IF Port: SMA Female
- Operational Temperature Range -10°C to +45°C
- Rugged and Compact Gold Plated Aluminum Package Design
- RoHS Compliant

#### Applications:

- Test & Measurement
- Military & Commercial Communications
- Electronic Warfare
- ELINT
- Research & Development

Fairview Microwave  
301 Leora Ln., Suite 100  
Lewisville, TX 75056  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

Typical Performance Data

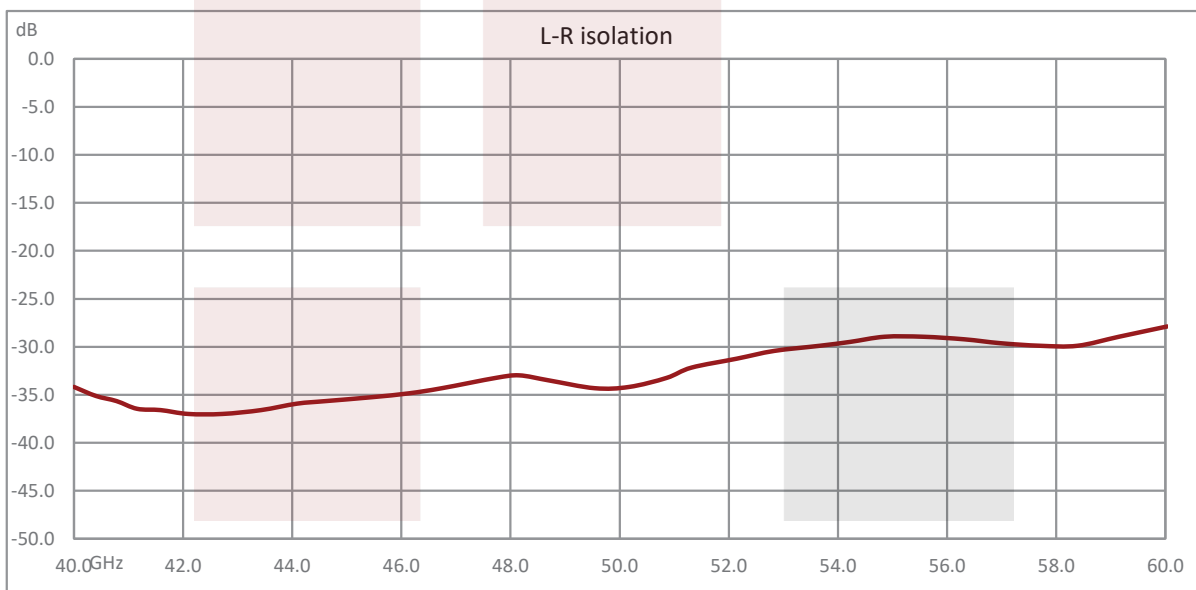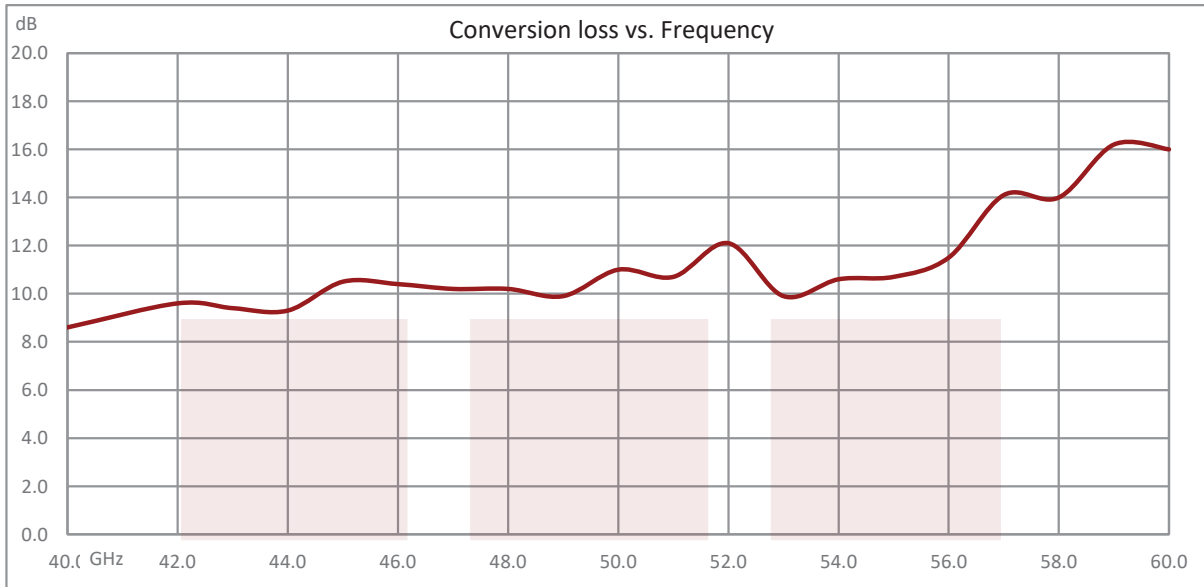

Waveguide Converter Mixer WR-19 from 40 GHz to 60 GHz, IF from DC to 20 GHz and LO Power of +13 dBm, UG-383/U-M Flange, U Band from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Waveguide Converter Mixer WR-19 from 40 GHz to 60 GHz, IF from DC to 20 GHz and LO Power of +13 dBm, UG-383/U-M Flange, U Band FMWGMX1003](#)

URL: <https://www.fairviewmicrowave.com/wr-19-waveguide-mixer-40-60-ghz-ug-383-u-m-fmwgmx1003-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

