


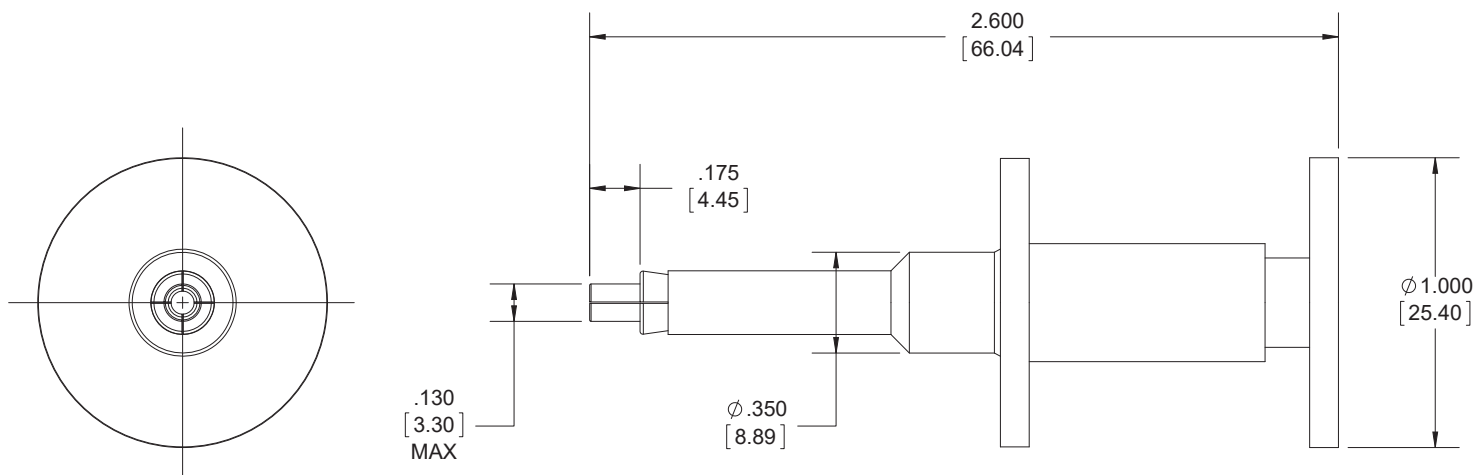


BODY & CONTACT: Passivated Stainless Steel, AMS-QQ-P-35
COLLET: Beryllium Copper, Gold MIL-DTL-45204
SPRING: Passivated Stainless Steel, AMS-QQ-P-35

STANDARD TOLERANCES

.X ±0.2
 .XX ±0.01
 .XXX ±0.005

*STANDARD TOLERANCES APPLY
 ONLY TO DIMENSIONS IN INCHES

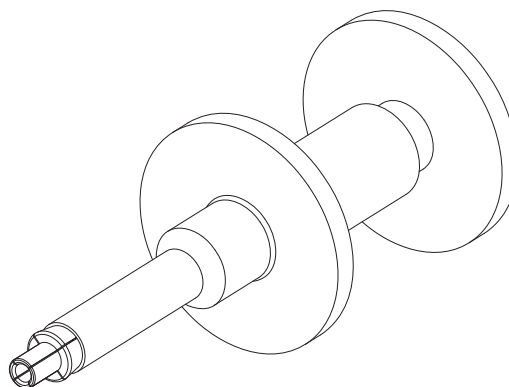

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

TITLE

INSTALLATION/EXTRACTION TOOL FOR SMP BLINDMATE
 INTERCONNECTS

DWG NO

MMTL7407

CAGE CODE

3FKR5

CAD FILE 082817

SHEET 1 OF 1

SCALE N/A

SIZE A

9999