

HN-M CLAMP RG14 RG217

SC4823

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-10 GHZ
 IMPEDANCE: 50 OHMS


MECHANICAL:

MATERIAL BODY: BRASS
 BODY PLATING: NICKEL
 CENTER CONTACT: BRASS
 CONTACT PLATING: Au 30 μ -in
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348A
 OP. TEMP RANGE: -55°C to +125°C


ROHS COMPLIANT

ASSEMBLY INSTRUCTIONS


1. STRIP CABLE TO DIMENSIONS SHOWN
2. SLIDE NUT, WASHER, AND GASKET ONTO CABLE
3. INSERT CABLE CENTER CONDUCTOR UNTIL CABLE DIELECTRIC LIES FLUSH AGAINST CENTER CONTACT
4. SOLDER CENTER CONTACT TO CENTER CABLE CONDUCTOR
5. SLIDE BRAID CLAMP UNTIL IT SEATS AGAINST CABLE JACKET
6. FOLD BACK BRAID WIRE TO COVER ON OUTSIDE OF BRAID CLAMP
7. INSERT CABLE ASSEMBLY AND HARDWARE ONTO CONNECTOR BODY
8. SCREW AND TIGHTEN NUT

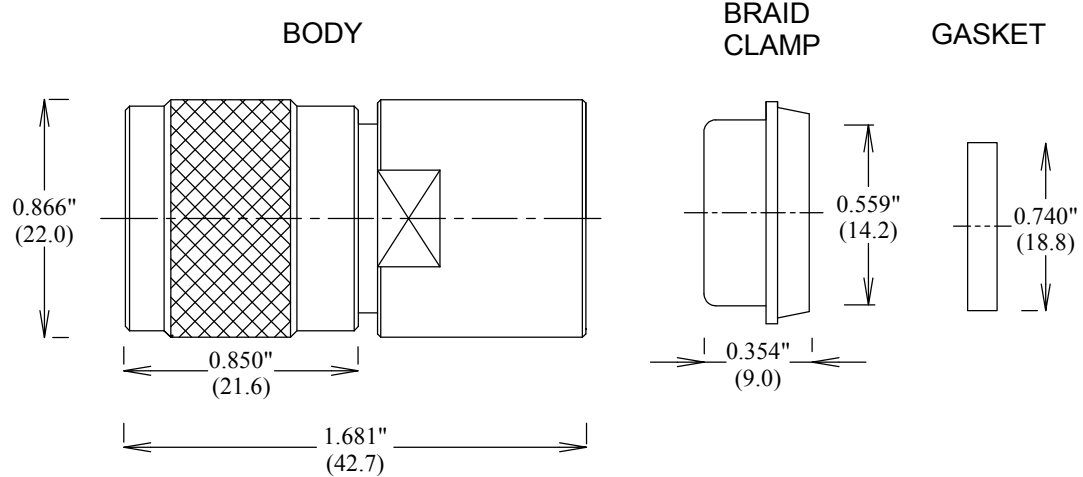


STRIPPING DIMENSIONS

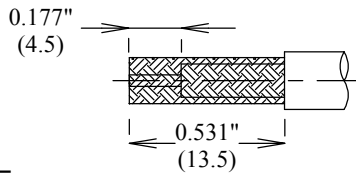

CENTER CONTACT

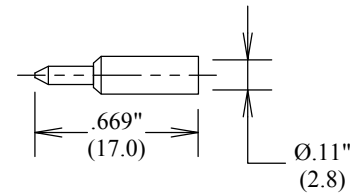

CLAMP NUT

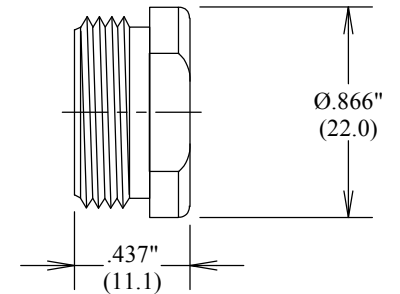

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE			
HN-M CLAMP RG14 RG217			
SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC4823	--
SCALE		SHEET	