

BNC-M CRIMP CONN RG316 RG174

SC6032


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-4 GHZ
VSWR 1.2:1 MAX
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C- +155C


MECHANICAL:

MATERIAL BODY: BRASS, NICKLE PLATED
CENTER CONTACT: BRASS
CONTACT PLATING: Si QQ-S-365
CAPTIVATED CONTACT
INSULATOR: TEFLON
INTERFACE: MIL-STD-348A
ROHS COMPLIANT

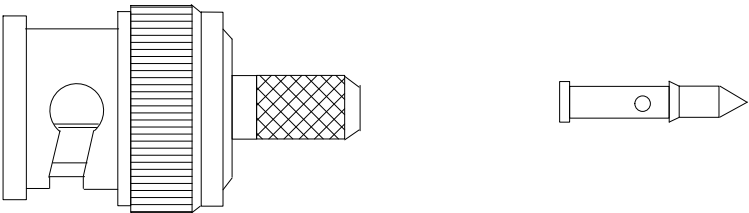

0.94"

.156"



.250"

.375"

STRIPPING DIMENSIONS

FAIRVIEW MICROWAVE INC.				
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM				
TITLE				
BNC-M CRIMP CONN RG316 RG174				
SIZE	CAGE CODE	DWG NO	REV	
A	3FKR5	SC6032		
SCALE			SHEET	