

BNC-M GRIP CONN RG55 RG58

SC6042

SPECIFICATIONS



ELECTRICAL:

FREQUENCY: 0-4 GHZ
VSWR 1.2:1 MAX
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C- +155C

MECHANICAL:

MATERIAL BODY: BRASS, NICKLE PLATED
CENTER CONTACT: BRASS
CONTACT PLATING: Si QQ-S-365
CAPTIVATED CONTACT
INSULATOR: TEFLON
INTERFACE: MIL-STD-348A
ROHS COMPLIANT

ASSEMBLY INSTRUCTIONS:
SLIDE BACKNUT ONTO CABLE
TRIM CABLE AS SHOWN
SLIT CABLE, 2 PLACES AS SHOWN, 180° APART
SLIDE PIN ASSEMBLY UNDER BRAID
SOLDER PIN ASSEMBLY TO CENTER CONDUCTOR
INSERT ASSEMBLY INTO BODY
TIGHTEN BY HOLDING NUT, TURNING BODY

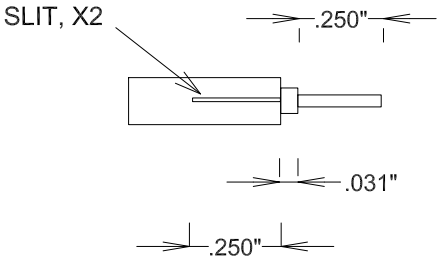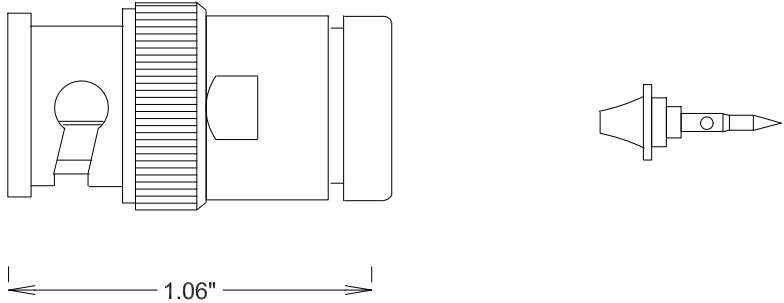

STRIPPING DIMENSIONS

			FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	
			TITLE BNC-M GRIP CONN RG55 RG58	
SIZE A			CAGE CODE 3FKR5	DWG NO SC6042
			REV --	
SCALE			SHEET	