

# SMB T PLUG-JACK-JACK

SM2011

## SPECIFICATIONS

### ELECTRICAL

FREQUENCY: 0-4 GHZ  
IMPEDANCE: 50 OHMS  
VSWR: 1.2:1


### ENVIRONMENTAL

-55°C TO +105 °C

### MATERIALS

BODY: NICKEL PLATED BRASS  
CONTACT PLATING: Au PER MIL G 45204  
CENTER CONTACTS: BeCu  
INSULATOR: PTFE  
INTERFACE: MIL-STD-883

ROHS COMPLIANT

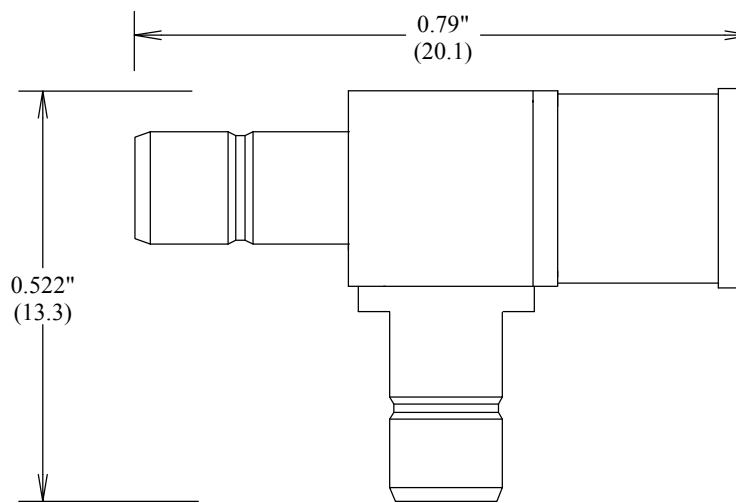

**FAIRVIEW MICROWAVE INC.**

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SMB T PLUG-JACK-JACK**

SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	<b>3FKR5</b>	<b>SM2011</b>	--

SCALE

SHEET

ALL DIMENSIONS IN inches(MM) Typical