



3.5mm Female to 2.4mm Male Adapter

3.5mm female to 2.4mm male adapter part number SM3067 from Fairview Microwave is in-stock and ships same day. This Fairview 3.5mm to 2.4mm adapter has a female to male gender configuration. SM3067 3.5mm female to 2.4mm male adapter operates to 33 GHz. The 3.5mm connector mates mechanically with commercially available SMA and 2.92mm (K) connectors. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connnector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Min	Тур	Max	Units
Frequency Range	DC		33	GHz
VSWR			1.2:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Sizo

Length Weight		0.772 in [19.61 mm] 0.01058 lbs [4.8 g]
Description	Connector 1	Connector 2
Туре	3.5mm Female	2.4mm Male
Polarity	Standard	Standard

Type 3.5mm Female 2.4mm Male

Polarity Standard Standard

Interface Specification IEEE STD 287 MIL-STD-348

Mating Cycles 500 500

Hex Size 5/16 inch

Mating Torque 8 to 10 in-lbs

[0.90 to 1.13 Nm]



Configuration:

- 3.5mm Female Connector 1
- 2.4mm Male Connector 2
- 50 Ohms
- Straight Body Geometry

Features:

- VSWR of 1.2:1 max up to 33 GHz
- 3.5mm interface meets IEEE STD 287
- 2.4mm interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Beryllium Copper Contact

Applications:

- Enables Between Series
 Connections
- General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





Material Specifications

Description	Connector 1	Connector 2	
Туре	3.5mm Female	2.4mm Male	
Contact Material	Beryllium Copper	Beryllium Copper	
Contact Plating	Gold	Gold	
Contact Plating Spec.	MIL-G-45204	MIL-G-45204	
Insulation Material	PEI/PCTFE	PEI/PCTFE	
Outer Contact Material	Passivated Stainless Steel		
Outer Contact Plating Spec.	QQ-P-35		
Body Material		Passivated Stainless Steel	
Body Plating Spec.		QQ-P-35	
Coupling Nut Material		Passivated Stainless Steel	
Coupling Nut Plating Spec.		QQ-P-35	

Environmental Specifications

Temperature

Operating Range


-55 to +135 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

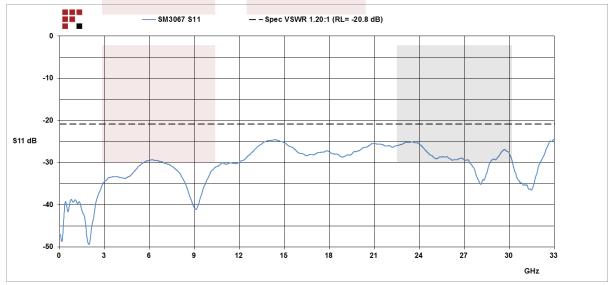





3.5mm Female to 2.4mm Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 3.5mm Female to 2.4mm Male Adapter SM3067

URL: https://www.fairviewmicrowave.com/3.5mm-female-2.4mm-male-adapter-sm3067-p.aspx







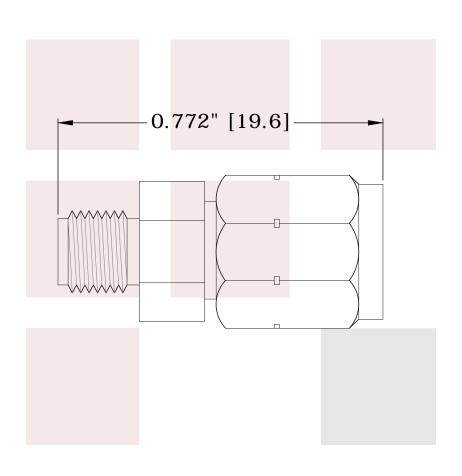

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].						
3.5mm Female to 2.4mm Male Adapter	DWG NO SM3067			CAGE C	CAGE CODE 3FKR5		
	CAD FILE 020216	SHEET	SCAL	E N/A	SIZE A	5568	