

7/16 - 7/16 M-F DIN ADAPTER

SM3396

SPECIFICATIONS

ELECTRICAL


FREQUENCY: 0-6 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.15:1 MAX

MECHANICAL


MATERIALS 7/16 BODY: TRIMETAL PLATED BRASS
MATERIALS CONTACTS SI PLATING
INSULATOR: TEFLON
RECOMMENDED TORQUE 7-16 221 IN-LBS
DURABILITY: 500 CYCLES MIN

OTHER SPECIFICATIONS PER DIN 47223
OPERATING TEMP: -45° TO +120° C

ROHS COMPLIANT

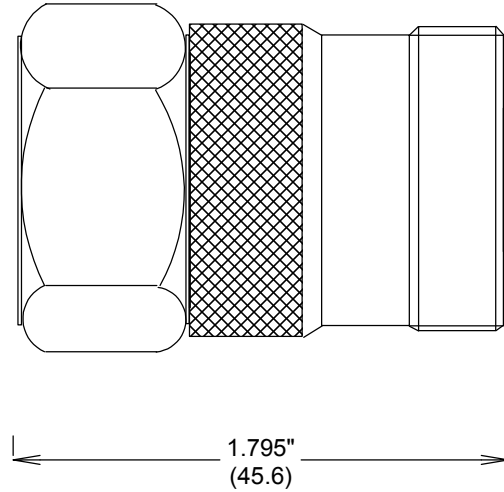

MEASUREMENTS BELOW ARE TYPICAL

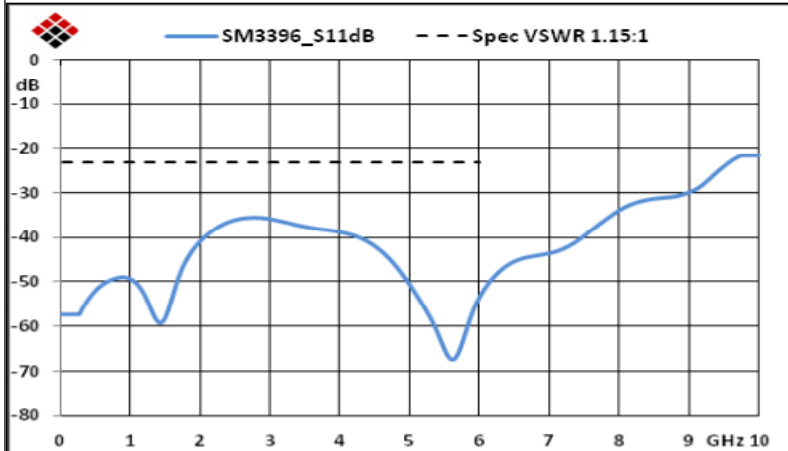

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

7/16 - 7/16 M-F DIN ADAPTER

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SM3396	--
SCALE			SHEET