

# SM3936 DATA SHEET

## 1.85mm Female to 1.85mm Female Adapter

1.85mm female to 1.85mm female adapter part number SM3936 from Fairview Microwave is in-stock and ships same day. This Fairview 1.85mm to 1.85mm adapter has a female to female gender configuration. SM3936 1.85mm female to 1.85mm female adapter operates to 67 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.25:1 maximum. The 1.85mm connector mates mechanically with commercially available 2.4mm connectors.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### **Electrical Specifications**

Description	Min	Тур	Max	Units	
Frequency Range	DC		67	GHz	
VSWR			1.25:1		
RF Leakage			-100	dB	

### **Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units	
Frequency Range	DC to 40	40 to 67				GHz	
VSWR, Max	1.15:1	1.25:1					

Electrical Specification Notes: Values at 25°C, sea level.

#### **Mechanical Specifications**

#### **Size**

 Length
 0.852 in [21.64 mm]

 Width
 0.312 in [7.92 mm]

 Weight
 0.0125 lbs [5.67 g]

Description	Connector 1	Connector 2		
Туре	1.85mm Female	1.85mm Female		
Polarity	Standard	Standard		
Interface Specification	IEC 169	IEC 169		
Mating Cycles	500	500		
Mating Cycles	500	500		



## **Configuration:**

- 1.85mm Female Connector 1
- 1.85mm Female Connector 2
- 50 Ohm
- Straight Body Geometry

#### Features:

- VSWR of 1.25:1 max up to 67 GHz
- 1.85mm interface meets IEC 169
- Contact plating according to MIL-G-45204
- Gold Plated Contact

## **Applications:**

· General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013 Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





### **Material Specifications**

Description	Connector 1 Connector	
Туре	1.85mm Female	1.85mm Female
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold	Gold
Contact Plating Spec.	MIL-G-45204	MIL-G-45204
Insulation Material	PEI/PCTFE	PEI/PCTFE
Outer Contact Material	Passivated Stainless Steel	Passivated Stainless Steel
Outer Contact Plating Spec.	QQ-P-35	QQ-P-35

### **Environmental Specifications**

**Temperature** 

Operating Range


-55 to +165 deg C

**Compliance Certifications** (see product page for current document)

### **Plotted and Other Data**

Notes:

## **Typical Performance Data**

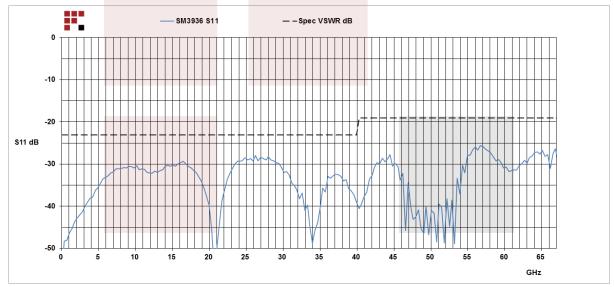






1.85mm Female to 1.85mm Female Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.


For additional information on this product, please click the following link: 1.85mm Female to 1.85mm Female Adapter SM3936

URL: https://www.fairviewmicrowave.com/1.85mm-female-1.85mm-female-adapter-sm3936-p.aspx

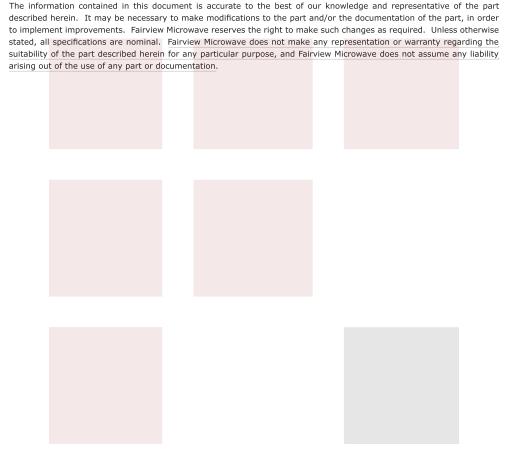





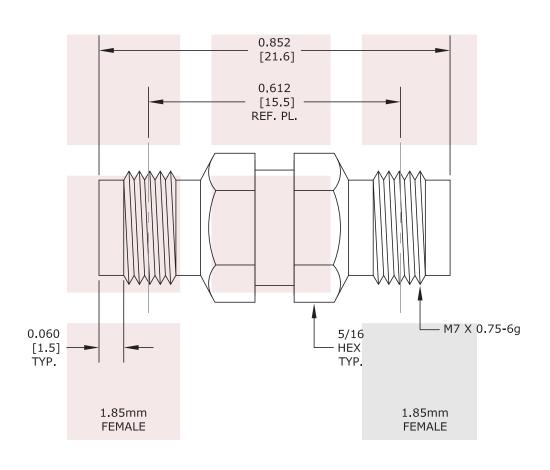

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].				
1.85mm Female to 1.85mm Female Adapter	DWG NO CAGE CODE SM3936			3FKR5	
	CAD FILE 120815	SHEET	SCALE N	/A SIZE	A 150