

# SM4015 DATA SHEET

# 75 Ohm N Male to N Male Adapter

75 ohm type N male to type N male adapter part number SM4015 from Fairview Microwave is in-stock and ships same day. This Fairview type N to type N adapter has a male to male gender configuration. SM4015 type N male to type N male adapter operates to 3 GHz.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

## **Electrical Specifications**

Description	Min	Тур	Max	Units
Frequency Range	DC		3	GHz

Electrical Specification Notes: Values at 25°C, sea level.

# **Mechanical Specifications**

Size

Length Width

Weight

1.58 in [40.13 mm] 0.78 in [19.81 mm]

0.11332 lbs [51.4 g]

Description	Connector 1	Connector 2
Туре	N Male	N Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348

### **Material Specifications**

Description	Connector 1	Connector 2		
Туре	N Male	N Male		
Contact Material	Beryllium Copper	Beryllium Copper		
Contact Plating	Gold	Gold		
Contact Plating Spec.	MIL-G-45204	MIL-G-45204		
Insulation Material	PTFE	PTFE		
Body Material	Brass	Brass		
Body Plating	Nickel	Nickel		
Body Plating Spec.	QQ-N-290	QQ-N-290		

**Compliance Certifications** (see product page for current document)

#### **Plotted and Other Data**

Notes:



# **Configuration:**

- N Male Connector 1
- N Male Connector 2
- 75 Ohm
- Straight Body Geometry

### **Features:**

- Type N interface meets MIL-STD-348
- Contact plating according to MIL-G-45204
- Gold Plated Contact

# **Applications:**

General Purpose Test

Fairview Microwave 1130 Junction Dr. #100 Allen, TX 75013

Tel: 1-800-715-4396 / (972) 649-6678

Fax: (972) 649-6689 www.fairviewmicrowave.com sales@fairviewmicrowave.com





75 Ohm N Male to N Male Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order


For additional information on this product, please click the following link: 75 Ohm N Male to N Male Adapter SM4015

URL: https://www.fairviewmicrowave.com/75-ohm-n-male-n-male-adapter-sm4015-p.aspx

to implem	ent impro	vements	. Fairview	/ Microw	ave reserv	es the righ	nt to mak	ke such	changes	as requ	uired. Unle:	ss oth	nerwise
											warranty re		
suitability	of the par	rt describ	oed hereir	n for an	y particula	r purpose,	and Fair	rview M	icrowave	does r	not assume	any l	liability
arising ou	it of the us	e of any	part or do	ocumen	tation.								





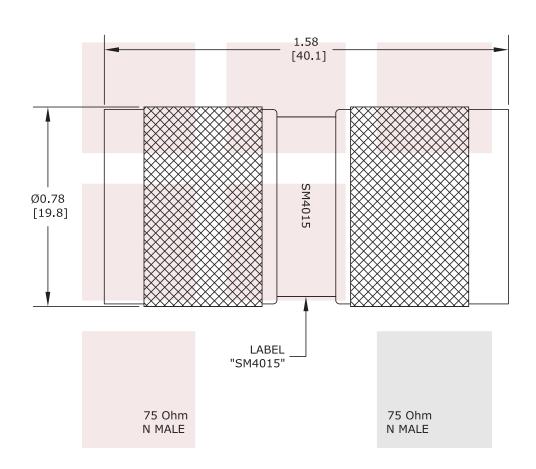

### STANDARD TOLERANCES

.X ±0.2 .XX ±0.1 .XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

FAIRVIEW MICROWAVE INC.  ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  3. DIMENSIONS ARE IN INCHES [mm].						
75 Ohm N Male to N Male Adapter	DWG NO SM4015				CAGE CODE 3FKR5		
	CAD FILE 101016	SHEET	SCALE	N/A	SIZE A	41742	