

## Slide-On BMA Jack to BMA Jack Slide-On Adapter

Slide-on BMA jack to BMA jack slide-on adapter part number FMAD1105 from Fairview Microwave is in-stock and ships same day. This Fairview BMA to BMA adapter has a jack to jack gender configuration and is built of durable stainless steel. FMAD1105 BMA jack to BMA jack adapter operates to 22 GHz. The Fairview Microwave RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters can be used to enable connections between two connector types that would otherwise not mate. Certain RF adapter configurations can also be used to protect connectors on expensive equipment where the number of connect and disconnect cycles is high. An RF, microwave, or millimeter wave adapter is connected to the equipment and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Fairview Microwave also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

### Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		22	GHz
VSWR			1.2:1	
Insertion Loss			0.32	dB
Operating Voltage (AC)			500	Vrms
DWV (AC)			1,500	Vrms
Insulation Resistance	5,000			MOhms

### Mechanical Specifications

Size	
Length	0.826 in [20.98 mm]
Width	0.311 in [7.9 mm]
Weight	0.011 lbs [4.99 g]

Description	Connector 1	Connector 2
Type	BMA Jack	BMA Jack
Connection Method	Slide-On	Slide-On
Polarity	Standard	Standard
Mating Cycles	1,000	1,000
Contact Retention Force, Min	6.07 lbs [2.75 Kg]	6.07 lbs [2.75 Kg]



### Configuration:

- Slide-On BMA Jack Connector 1
- Slide-On BMA Jack Connector 2
- 50 Ohm
- Straight Body Geometry

### Features:

- VSWR of 1.2:1 max up to 22 GHz
- 51.18µ in. minimum contact plating
- Gold Plated Beryllium Copper Contact
- Low-Engagement Force

### Applications:

- General Purpose Test
- Blind Mating
- Rack and Panel
- Phased Array Systems
- Base Stations
- RF Backplanes
- Test I/O

Fairview Microwave  
1130 Junction Dr. #100  
Allen, TX 75013  
Tel: 1-800-715-4396 / (972) 649-6678  
Fax: (972) 649-6689  
[www.fairviewmicrowave.com](http://www.fairviewmicrowave.com)  
[sales@fairviewmicrowave.com](mailto:sales@fairviewmicrowave.com)

**Material Specifications**

Description	Connector 1	Connector 2
Type	BMA Jack	BMA Jack
Contact Material	Beryllium Copper	Beryllium Copper
Contact Plating	Gold	Gold
Contact Plating Spec.	51.18µ in. minimum	51.18µ in. minimum
Insulation Material	PTFE	PTFE
Outer Contact Material	Beryllium Copper	Beryllium Copper
Outer Contact Plating	Gold	Gold
Body Material	Passivated Stainless Steel	Passivated Stainless Steel

**Environmental Specifications**

**Temperature**

Operating Range -65 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**


Notes:

Slide-On BMA Jack to BMA Jack Slide-On Adapter from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [Slide-On BMA Jack to BMA Jack Slide-On Adapter FMAD1105](#)

URL: <https://www.fairviewmicrowave.com/slide-on-bma-jack-bma-jack-slide-on-adapter-fmad1105-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

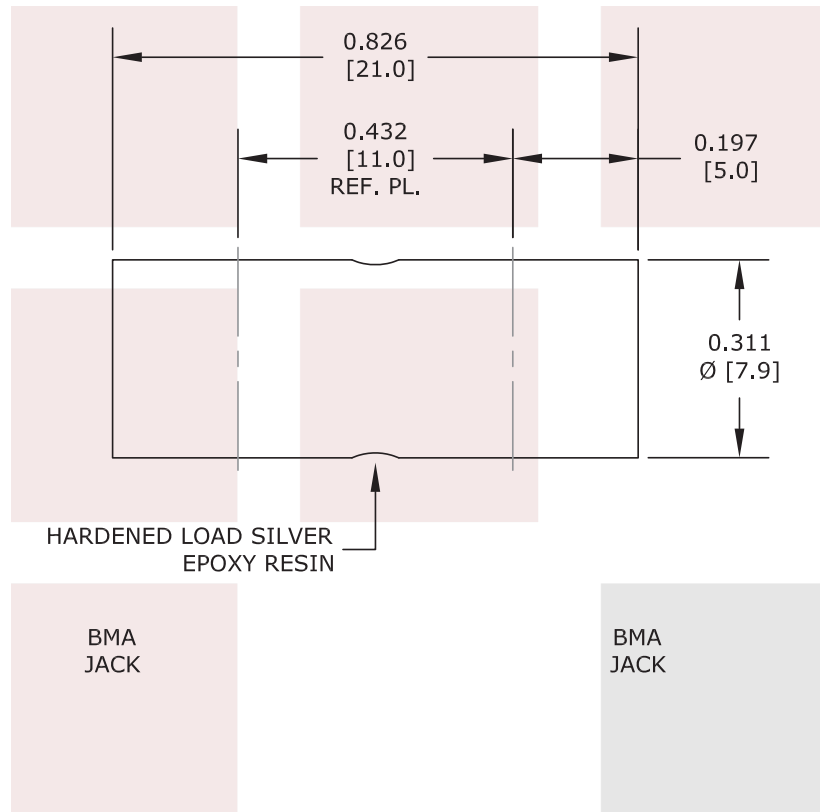

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<b>FAIRVIEW MICROWAVE INC.</b> ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE Slide-On BMA Jack to BMA Jack Slide-On Adapter		DWG NO FMAD1105		CAGE CODE 3FKR5	
CAD FILE	020117	SHEET	SCALE	N/A	SIZE A 2233