

WR-159 to SMA Female Waveguide to Coax Adapter CMR-159 with 4.9 GHz to 7.05 GHz D Band in Aluminum, Paint

The FMWCA1052 is a waveguide to coaxial adapter operating in the D Band with a 4.9 to 7.05 GHz frequency range. This adapter offers a WR-159 waveguide interface size using a standard CMR-159 Flange. The FMWCA1052 is constructed of Aluminum Alloy and painted to ensure durability. The coaxial connector offered by this adapter uses a SMA Female Connector.

Configuration

Waveguide Size	WR-159
Flange	CMR-159
RF Connector	SMA Female
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	4.9		7.05	GHz
VSWR		1.25:1		

Mechanical Specifications

RF Connector
Connector Type

SMA Female

Waveguide Interface

Waveguide Type
Flange Type
Body Material and Plating

WR-159
CMR-159
Aluminum, Paint

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise



Features:


- D Band
- 4.9 to 7.05 GHz Frequency Range
- WR-159 Waveguide Interface
- CMR-159 Flange
- SMA Female RF Interface
- Right Angle

Applications:

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Fairview Microwave
301 Leora Ln., Suite 100
Lewisville, TX 75056
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Typical Performance Data

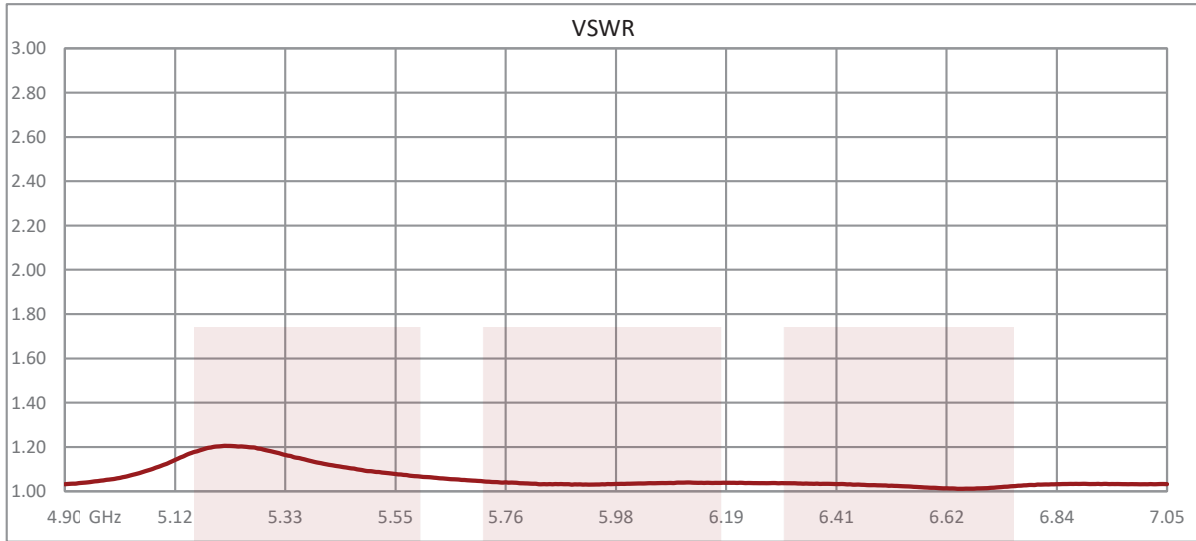


WR-159 to SMA Female Waveguide to Coax Adapter CMR-159 with 4.9 GHz to 7.05 GHz D Band in Aluminum, Paint from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [WR-159 to SMA Female Waveguide to Coax Adapter CMR-159 with 4.9 GHz to 7.05 GHz D Band in Aluminum, Paint FMWCA1052](https://www.fairviewmicrowave.com/wr159-sma-female-waveguide-to-coax-adapter-cmr-159-fmwca1052-p.aspx)


URL: <https://www.fairviewmicrowave.com/wr159-sma-female-waveguide-to-coax-adapter-cmr-159-fmwca1052-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

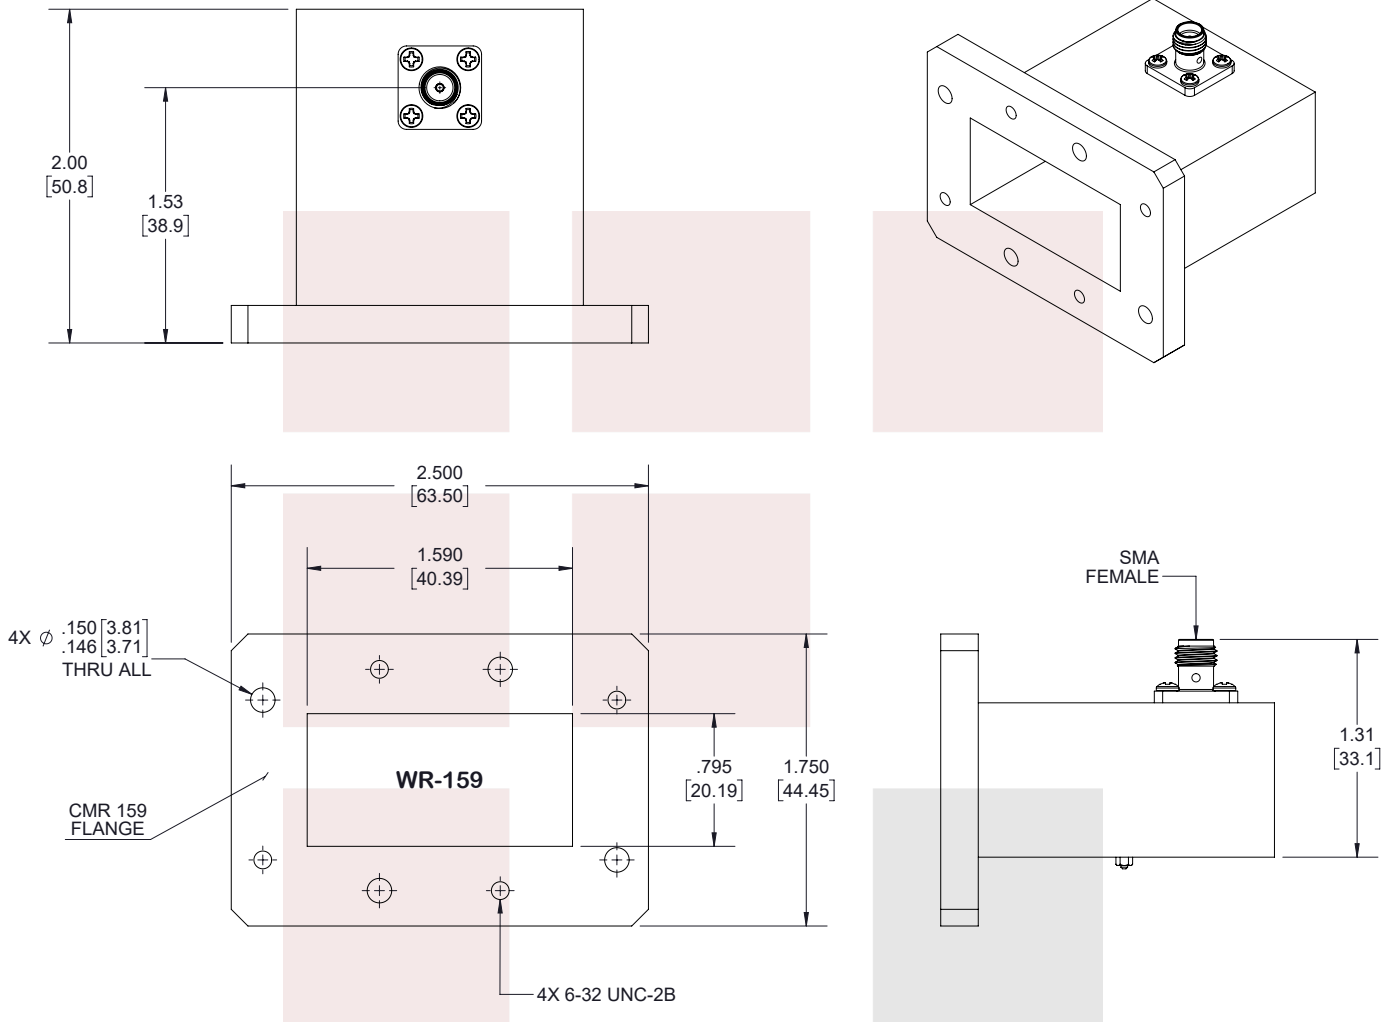

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].					
	DWG NO FMWCA1052			CAGE CODE 3FKR5		
TITLE WR-159 to SMA Female Waveguide to Coax Adapter CMR-159 with 4.9 GHz to 7.05 GHz D Band in Aluminum, Paint		CAD FILE 10/03/18	SHEET 1 OF 1	SCALE N/A	SIZE A	7361