

MIXER DOUBLED BALANCED RF 1-1000 IF 0-1000MHZ

SFM011000

SPECIFICATIONS

ELECTRICAL

FREQUENCY:

LO/RF: 1-1000 MHZ

IF: DC-1000 MHZ

LO DRIVE: +7 dBm Typ.

CONVERSION LOSS : 8.0 dB MAX

L/R ISOLATION: 25 dB MIN

L/I ISOLATION: 20 dB MIN

1 dB COMPRESSION POINT: + 1dBm Typical


ROHS COMPLIANT

PORT CONFIGURATION

RF: 1

LO: 3

IF: 2

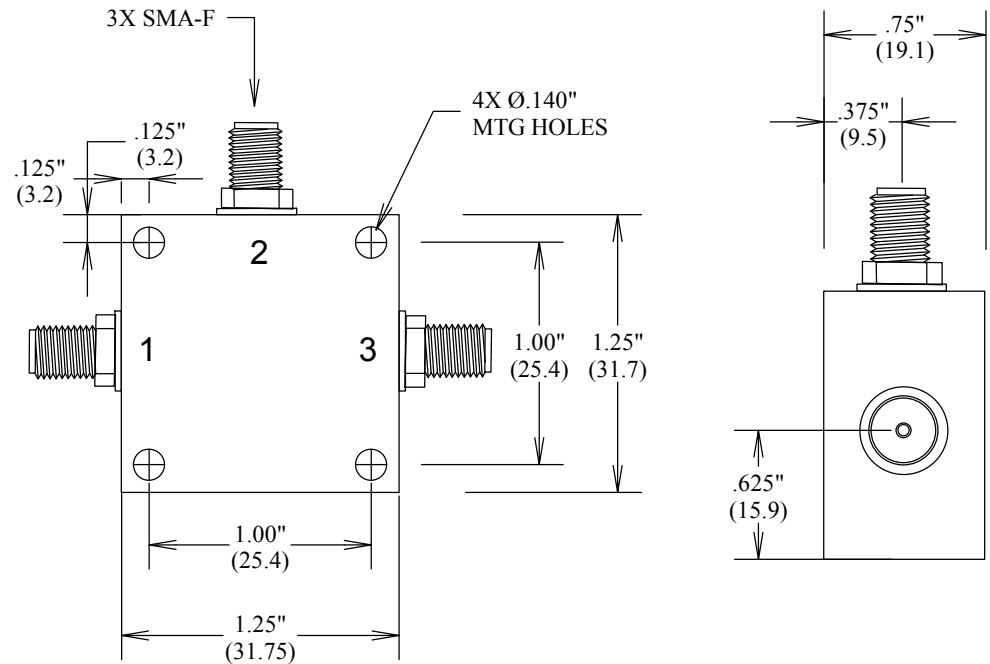

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

MIXER DOUBLED BALANCED
RF 1-1000 IF 0-1000MHZ

SIZE

A

CAGE CODE

3FKR5

DWG NO

SFM011000

REV

--

ALL DIMENSIONS IN inches(MM) Typical

SCALE

SHEET