

## SMB Plug to BNC Male Cable RG-188 Coax




### FMCA100084

#### Configuration

- Connector 1: SMB Plug
- Connector 2: BNC Male
- Cable Type: RG-188
- Coax Flex Type: Flexible

#### Features

- Max Frequency 3 GHz
- PTFE Jacket

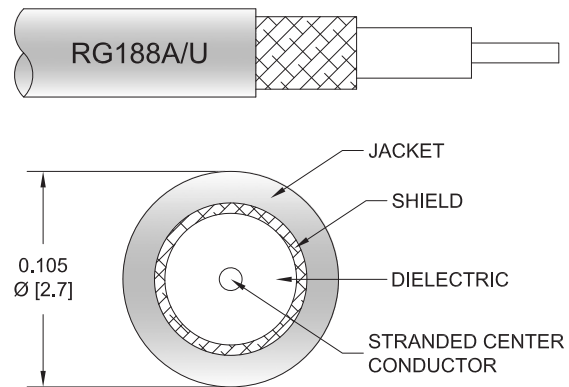

#### Applications

- General Purpose
- Laboratory Use

#### Description

The SMB plug to BNC male cable using RG188 coax, part number FMCA100084, from Fairview Microwave is in-stock and ships same day. This Fairview SMB to BNC cable assembly has a plug to male gender configuration with 50 ohm flexible RG-188 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMCA100084 SMB plug to BNC male cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter	0.5 in [12.7 mm]
Weight	0.041 lbs [18.6 g]

##### Cable

Cable Type	RG-188
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE

## SMB Plug to BNC Male Cable RG-188 Coax



### FMCA100084

Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	PTFE, White
Jacket Diameter	0.11 in [2.79 mm]

### Connectors

Description	Connector 1	Connector 2
Type	SMB Plug	BNC Male
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Configuration	Straight	Straight
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification	3 µin minimum	100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum

### Environmental Specifications

Operating Range Temperature	-55 to +165 deg C
-----------------------------	-------------------

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:


## SMB Plug to BNC Male Cable RG-188 Coax



### FMCA100084

#### Typical Performance Data

#### How to Order

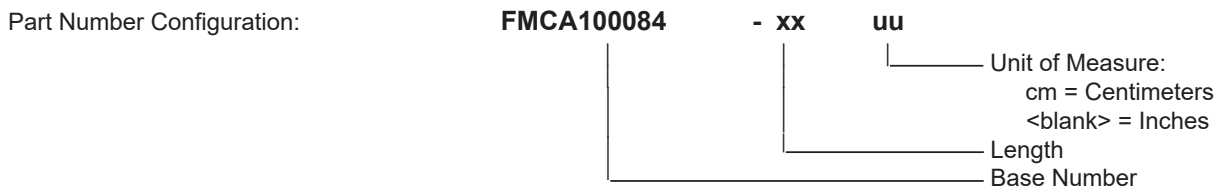

Example: FMCA100084-12 = 12 inches long cable  
FMCA100084-100cm = 100 cm long cable

SMB Plug to BNC Male Cable RG-188 Coax from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [SMB Plug to BNC Male Cable RG-188 Coax FMCA100084](https://www.fairviewmicrowave.com/smb-plug-to-bnc-male-cable-rg188-coax-fmca100084)

URL: <https://www.fairviewmicrowave.com/smb-plug-to-bnc-male-cable-rg188-coax-fmca100084-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume liability arising out of the use of any part or document.

# FMCA100084 CAD Drawing

## SMB Plug to BNC Male Cable RG-188 Coax

