


# ADAPTER MINI SMP/F-2.4/M 50GHZ

SM8934


## SPECIFICATIONS

**ELECTRICAL:**  
 FREQUENCY: 0-50 GHZ  
 IMPEDANCE: 50 OHMS  
 VSWR: 1.25:1 MAX

**MECHANICAL:**  
 MATERIAL SMP BODY: BeCu  
 MATERIAL 2.4mm BODY: PASS S STEEL  
 CENTER CONTACTS: BeCU  
 PLATING: Au PER MIL-G-45204  
 INSULATOR: PTFE  
 INTERFACE: SMP DESC 94007  
 INTERFACE: 2.4 MIL-STD-348B  
 OP. TEMP RANGE: -55° to +125°C  
 ROHS COMPLIANT

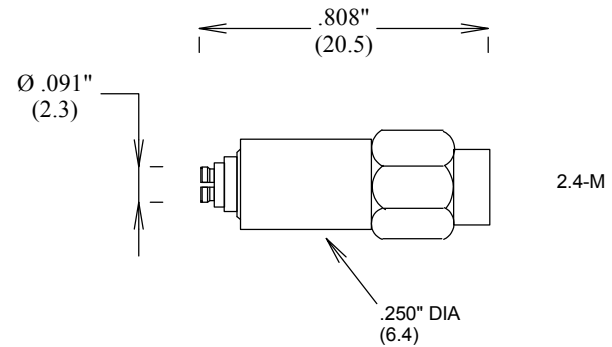

MEASUREMENTS BELOW ARE TYPICAL

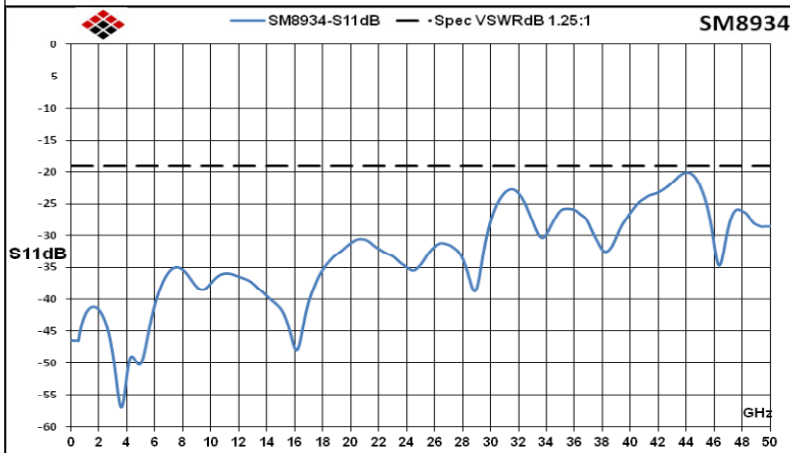

ALL DIMENSIONS IN inches(MM) Typical

<b>FAIRVIEW MICROWAVE INC.</b>			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE			
<b>ADAPTER MINI SMP/F-2.4/M 50GHZ</b>			
SIZE	CAGE CODE	DWG NO	REV
<b>A</b>	<b>3FKR5</b>	<b>SM8934</b>	<b>A</b>
SCALE		SHEET	